

Welcome to visit/follow Gree Global Platform



Note:

Gree is committed to continuously improving its products to ensure the highest quality and reliability standards, and to meet local regulations and market requirements.

All features and specifications are subject to change without prior notice.

All images provided in this catalogue are used for illustration purposes only.
Copyright© Gree Electric Appliances, Inc. of Zhuhai. All rights reserved.

GC-2311-03



GREE ELECTRIC APPLIANCES, INC. OF ZHUHAI

Contact add: West Jinji Rd, Qianshan, Zhuhai, Guangdong, China 519070

Tel: (+86-756) 852 2218
Email: gree@cn.gree.com

Fax: (+86-756) 8614998
http://www.gree.com

HONG KONG GREE ELECTRIC APPLIANCES SALES LIMITED

Add: Unit 2612, 26/F, Mira Place Tower A 132 Nathan Road, TsimshaTsui, Kowloon, Hong Kong

Tel: (852) 3165 8898 Fax: (852) 3165 1029



2024
RESIDENTIAL
AIR CONDITIONER

ABOUT GREE

Gree Electric Appliances, Inc. of Zhuhai was founded in 1991 and was listed on the Shenzhen Stock Exchange in November 1996. At the beginning, Gree was only a company that assembled residential air conditioners. Now it has grown into a diversified global technological industrial group that has expanded its business to household consumer goods and industrial equipment under three brands: GREE, KINGHOME and TOSOT. Gree is the number one brand of air conditioners in the world in 2022*.

2023

Gree entered into the list of Forbes Global 2000 again and **ranked 331, up 25 places compared with the previous year.**

2022

Gree has ranked the **487th** on the list of **Fortune Global 500.**

2019

Gree entered into **Fortune Global 500.**
Gree's return on equity (ROE) ranked the first among the 129 Chinese enterprises on the list.

Gree products are sold widely to more than 190 countries and regions.

Action makes the future and innovation makes achievement. Looking forward, Gree will press ahead with its business philosophy of passion, innovation and realization. We aim to build a centenary air conditioning enterprise and create a better life for humankind.

2018

Gree entered into the list of **Forbes Global 2000** again and ranked **No. 294**, moving up 70 places compared with the previous year.

Gree's sales revenue exceeded **30.23 billion USD.**

2017

Gree's sales revenue exceeded **22.21 billion USD.**

2016

Gree's sales revenue exceeded **16.51 billion USD.**

2015

Gree's sales revenue exceeded **15.08 billion USD.**

*Gree is the number one brand of air conditioners in the world in 2022

Footnote: "Source Euromonitor International Limited; Consumer appliances 2023ed; retail volume sales in units, 2022 data."



Source Euromonitor International Limited;
Consumer appliances 2023ed;
retail volume sales in units, 2022 data.

Claim: “ Gree is the number one brand of air conditioners
in the world in 2022 ”

Footnote: “ Source Euromonitor International Limited; Consumer appliances 2023ed;
retail volume sales in units, 2022 data.”

GREE ENTERED INTO THE LIST OF
FORBES GLOBAL 2000
AGAIN AND RANKED
NO. 331

CONTENTS

P01	NEW TECHNOLOGY			P83	PORTABLE TYPE		
P11	KEY FUNCTIONS			P85	Aovia		
		P73	FLOOR-STANDING TYPE	P87	Aolis	P99	VEHICLE AIR CONDITIONER
				P88	Purity		
P49	WALL-MOUNTED TYPE	P75	I-Shine				
		P77	T-Fresh				
P51	Airy						
P55	S-cool			P89	DEHUMIDIFIER		
P57	Soyal	P79	WINDOW TYPE	P91	Verty	P105	LIGHT COMMERCIAL
P59	Clivia			P93	Aovia		
P63	G-Tech	P81	Coolani	P94	Aolis	P109	Free Match
P65	Fairy			P95	Aomi	P114	U-match
P66	Pular			P96	Chalet		
P67	Cosmo			P97	Granto		
P69	Charmo			P98	Petal		
P71	Aphro						
P72	Console						



NEW TECHNOLOGY

- ChillSwipe
- MiniERV
- G-AI 2.0 Technology
- R290 ECO Refrigeration
- Colasma Air Purification Technology
- G-Max Outdoor Units
- 2 in 1 Dehumidifier: Dehumidification and Purification



ChillSwipe

No chance for chill

Continuous Heating Technology

Defrost logic based on frost growth and system parameter, so as to constantly keep heating during defrosting without shut down.

1 Unique algorithm

Unique algorithm to sense the frost accumulated on the condenser and judge the thin frost status

2 Clever use of heat

A new type of EXV is developed to increase the maximum flow. The heat of throttling refrigerant is used for defrosting. (In heating mode, some heat is used for heating while some is used for defrosting.)

3 Rapid removing of thin frost

Adjust system operating parameters to enter the thin frost rapid removing mode.


4 Continuous heating

During defrosting, the indoor unit keeps running to ensure normal heating.

Note: Take Airy for an example; other units are subject to the actual situations.

10-Hour Constant Heating

Say goodbye to temperature fluctuations. Enjoy a seamless and comfortable experience with smaller and negligible temperature difference.

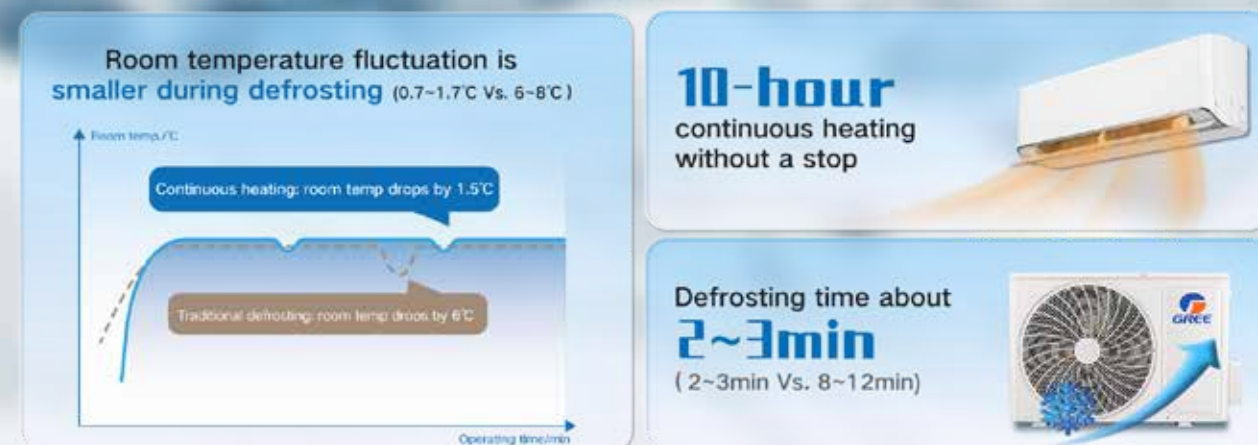

G 03

Hybrid Defrosting Technology (HDT)

Innovative defrosting algorithm with dual defrosting mode to maintain continuous heating all night long.



Under ultra-low temperatures (below -10°C), thin frost rapid removing mode is turned off and the unit will turn to Gree intelligent defrosting mode to ensure safe and stable operation.

Note: Take Airy for an example; other units are subject to the actual situations. Under Gree intelligent defrosting mode, the unit operates in cooling and the indoor fan stops. The maximum time for a single defrosting operation is 12 minutes (This is a normal design, which may vary depending on the system.)



G 04

MiniERV


MiniERV (Mini Energy Recovery Ventilation) adopted Innovative total heat two-way ventilation system, Instant fresh air provision for great air experience

Fresh air

Clivia adopts the innovative two-way air ventilation system. In addition to intake outdoor fresh air, it can also discharge indoor foul air to guarantee clean indoor air.




Without fresh air function
High carbon dioxide content; with unpleasant odor

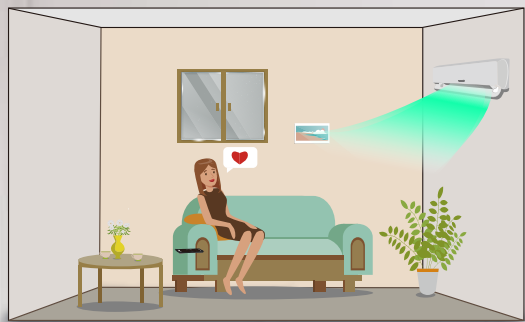

With fresh air function
Low carbon dioxide content and fresh air

Total heat two-way ventilation system


Bidirectional ventilation principle is adopted, with the air inlet and outlet placed at the same unit to create circulation. Thanks to the total heat exchanger, there is only heat exchange, ensuring air quality and satisfactory temperature.

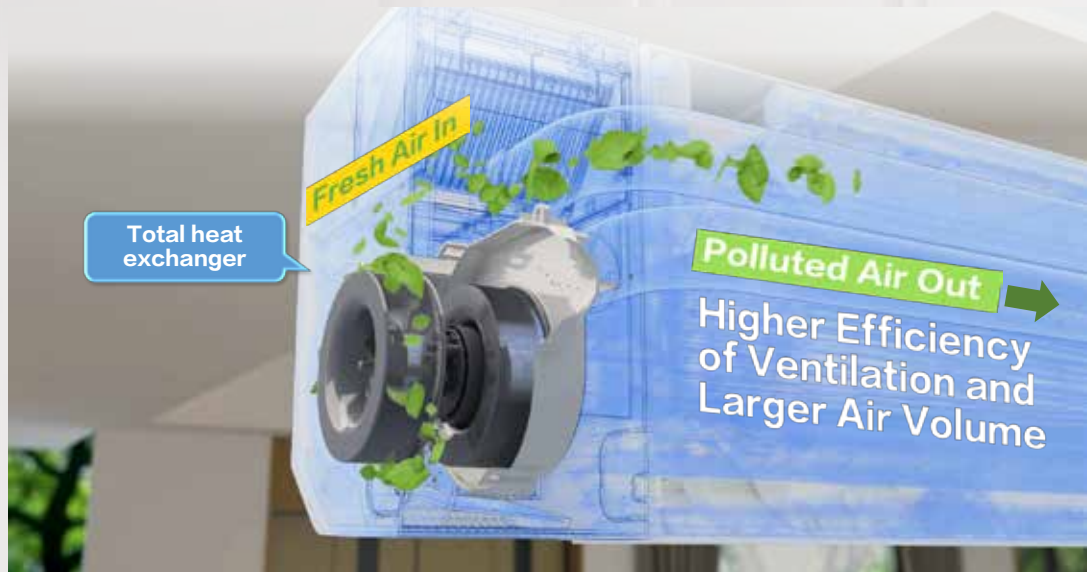

Instant fresh air provision for great air experience

Direct air exchange in conventional ventilation mode will consume indoor energy, affect indoor cooling and heating and waste energy.

With the total heat exchanger, the unit will change the temperature of the outdoor fresh air while discharging the indoor air, so as to diminish the attenuation of cooling and heating capacity during fresh air provision, save energy and provide better temperature experience.

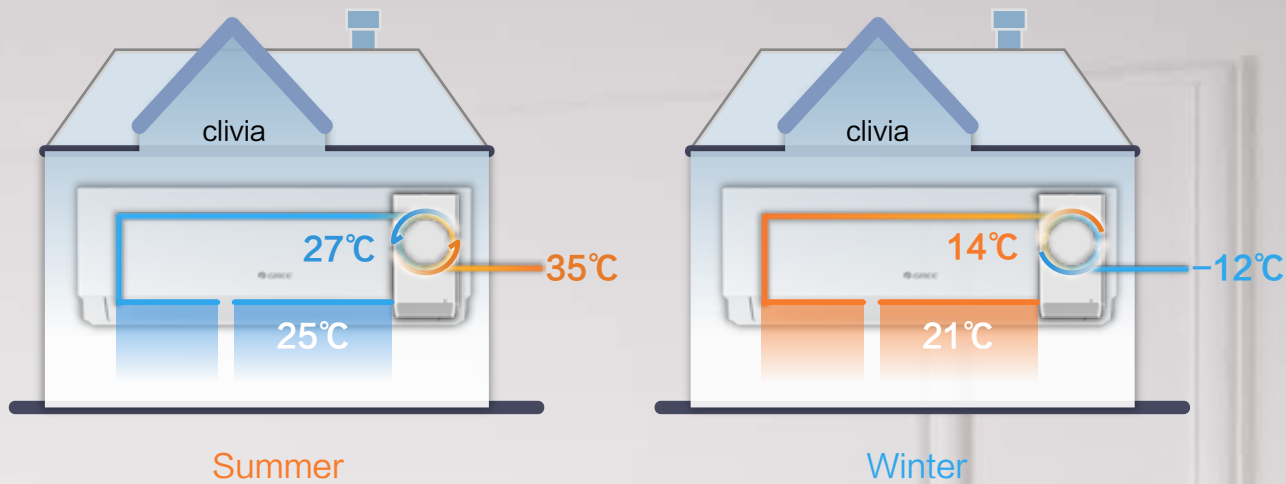

Note: In cooling or heating mode, temperature after fresh air ventilation is related to real-time air volume, indoor and outdoor humidity and other factors, this figure is for reference only.

Superior performance

High-efficiency ventilation:

Conduct ventilation once for every hour; it can eliminate indoor formaldehyde, odor, bacteria and other dirty air quickly, which is comfortable and healthy.

Energy-saving

Comfortable temperature. Compared with the traditional ventilation device without full heat exchange ventilation function, the air conditioner can save about 1kWh of electricity per day (calculate as running 24 hours a day).

Low noise

As low as 19db.

Double filters

Top filter +HEPA healthy filter.

R290 ECO Refrigeration

Gree developed R290 air conditioners which is eco-friendly to the environment, and completed the first production line for R290 air conditioners in the world. It has played the demonstration effects for the application of environment-friendly technolgoes in Chinese or even global air conditioning industry, which has been appraised as "world-leading" level.

Upgraded safety

Refrigeration leakage prevention

The built-in detection sensor can quickly detect the leakage of refrigerant at real time. When a certain concentration is reached due to the refrigerant leakage, below measures will be activated:



The buzzer gives out 5s



Error code (U9) is displayed on the indoor unit



Indoor fan operates at high fan speed to quickly and effectively disperse the refrigerant



The compressor of outdoor fan stops operation

Comprehensive fault monitoring

Thanks to the sensor and the service life detection function, the safe operation can be guaranteed.

Service life monitoring

The sensor can work for consecutive 30000h; when the service life is over, it will alarm automatically and the compressor stops operation.

Fault monitoring

When there is fault for the sensor module and the main board has detected the fault signal, the buzzer gives out 5s and the display board displays error code L2. Indoor fan operates at high fan speed and the compressor stops operation.

Strict quality control

- Big air volume motor and blade**
The air volume is up to 850m3/h, which can disperse the refrigerant quickly for upgraded safety.
- Upgrade structural parts**
Adopt the non-detachable joint, cancel the process pipe and reduce refrigerant leakage points to improve the safety.
- Anti-explosion controller**
Adopt strengthened insulation design, separate strong current and weak current and select anti-explosion electric elements for ensuring safety.

After-sales guarantee for installation

Please refer to QJ/GD 60.00.001/1 R290 Air Conditioners After-sales Installation and Maintenance Guideline for related standards.




High Energy Efficiency

R290 eco-friendly refrigerant combines with the new system for excellent performance. It has the same capacity as R32 refrigerant, energy-saving and environment-friendly.




Environment-friendly future

GWP<3, Contribute to green, low-carbon and sustainable development

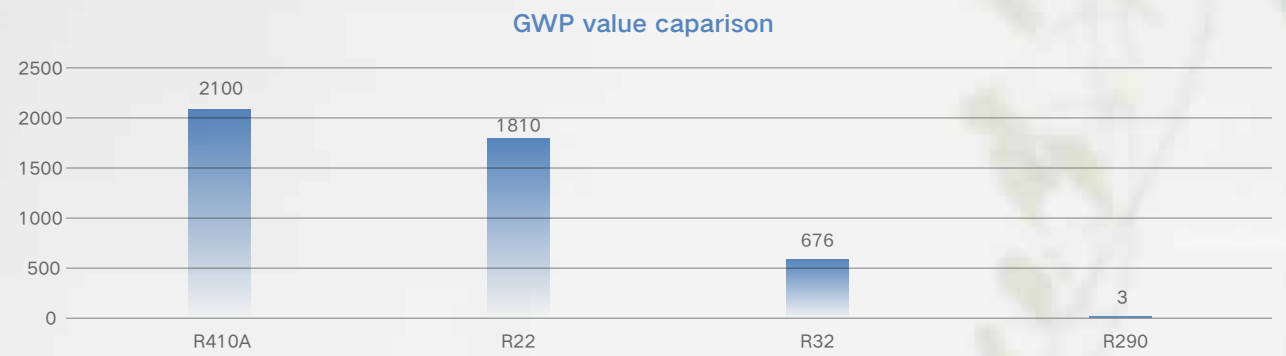


Carbon emission < 99.7%, Contribute to green, low-carbon and sustainable development

Model	Refrigerant	Carbon emission
GWH12YCXD-K6DNA1B	R32 0.8kg	0.54tonnes
GWH12ATDXBK5DNA1A	R290 0.45kg	0.00148tonnes

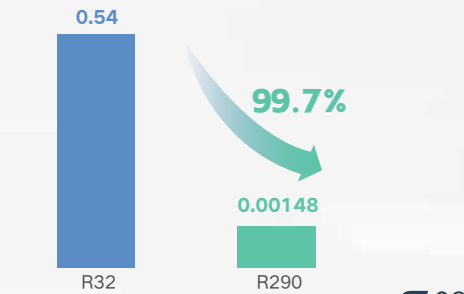

G-AI 2.0 Technology

Gree self-developed AI smart air conditioner initially integrates AI technology with air conditioning technologies.

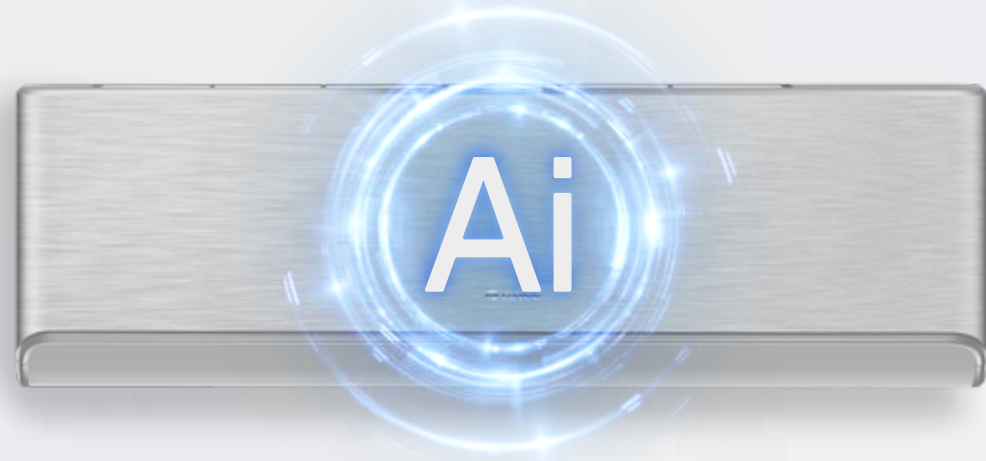

Learning to be high-efficiency

AI algorithm is adopted. The AI algorithm combines reinforced learning and expert system theory, learns the complex and changeable user environment through online interaction, uses the algorithm to dynamically adjust the operation mode of air conditioner, and selects the optimal energy-saving control strategy.



15%
Power Saving per Year

Note: The data is tested with European models.

Learning to be comfortable

The AI algorithm can learn and practice online in combination with the current ambient temperature, humidity, room size and other factors, actively adjust the control strategy, slightly adjust the operation mode of the air conditioner, and keep the environment in a dynamically comfortable state.

The longer the AI algorithm is used, the more it can adapt to the environment, and the better it can understand the needs of users, so that comfort spreads to every corner of the room.



Colasma Air Purification Technology


The cold plasma achieve the whole house purification by bacteria inhibition and deodorization.



Sterilize and purify the air

As one of the effective ways to deal with indoor air pollution, Colasma can effectively remove bacteria and kill viruses, such as coronavirus, influenza virus, rotavirus, bacillus, coccus and molds.


According to the tests carried out by an authoritative testing institution, ion release exceeds 300X10⁴n/cm³ and the removal rate of air floating microorganisms is more than 93% in one hour.

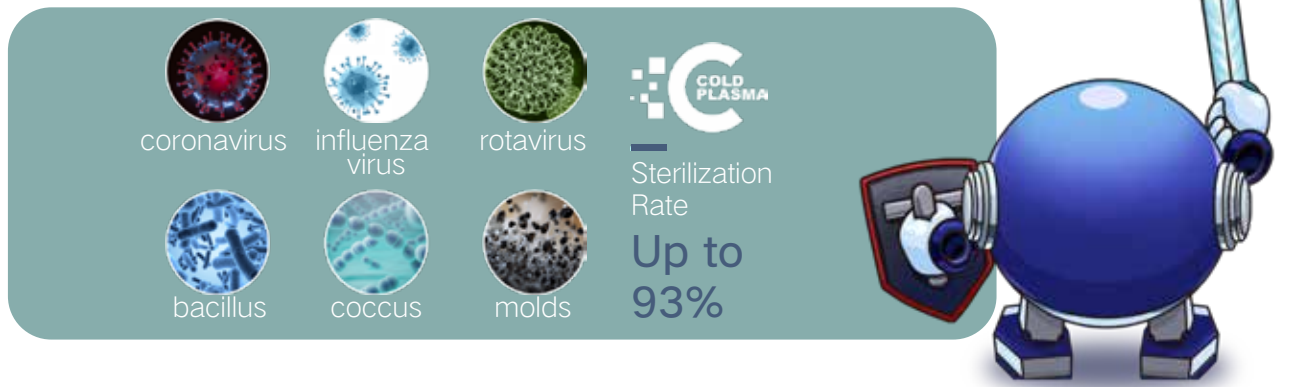

Note: Data sourced from Test Report 2020001571b; test conducted in a 30m² laboratory, where the amount of air-borne bacteria before purification is 4.88 × 10² CFU/m².

Remove odor and inhibit static electricity

Because the number of negative ions is greater than that of positive ions, the excess negative ions floating in the air may additionally remove unpleasant odors inevitable in daily life, such as smell of cigarette and smell of toilet. Besides, it can reduce static electricity so that pollen and dust is not easy to attach to curtains and clothing.

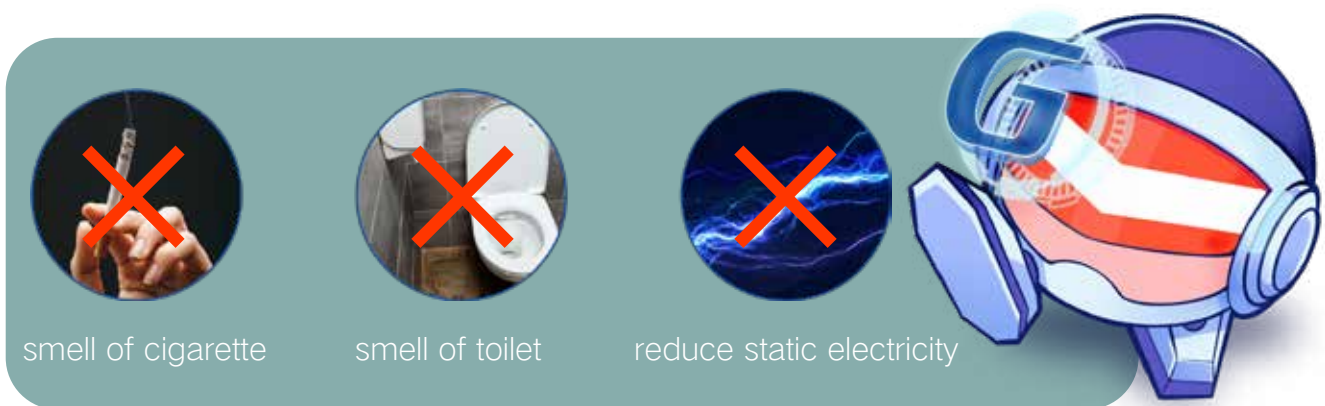




Function setting instructions



Press this button to turn on or turn off the health and UVC functions in operation status.



- When selecting “” with remote controller, Cold Plasma will be turn on.
- When selecting “” with remote controller, UVC sterilization function will be turn on.
- When selecting “” with remote controller, Cold Plasma and UVC sterilization function will be turn on together.

Note: These functions are decided by specific models.

G-MAX Outdoor Units

MAX Convenience -- High Loading Capacity and Easy Installation

High loading capacity

359 sets/HQ loading capacity for G-MAX (0.75P) in sea transportation, which is market-leading and effectively reduces the costs of transportation and storage.




Compact size

The size of the outdoor unit is reduced by 31.79% at most, which makes it easy to install even at a narrow balcony.



Easy installation and maintenance

G-MAX (except 1P) allows you to replace the main board by only removing the top cover, which is suitable for working at high places or in small installation space such as a narrow balcony.

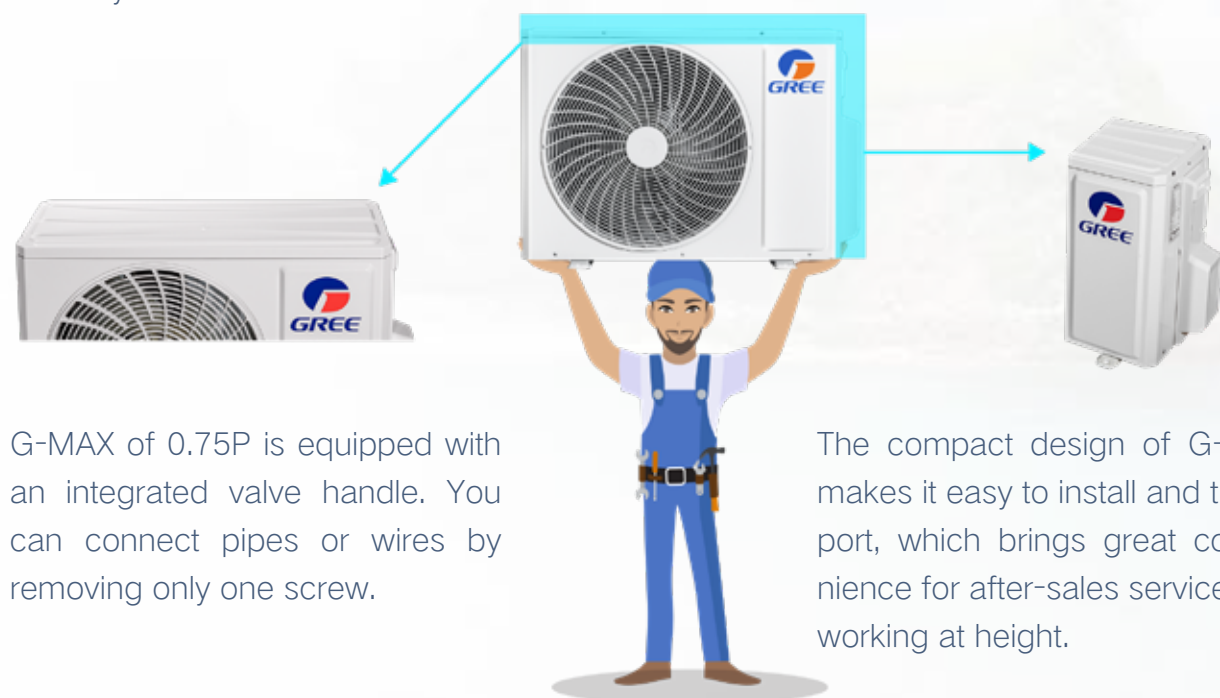


G-MAX of 0.75P is equipped with an integrated valve handle. You can connect pipes or wires by removing only one screw.

The compact design of G-MAX makes it easy to install and transport, which brings great convenience for after-sales service and working at height.

MAX Guard -- 6 Anti-corrosion Measures

6 anti-corrosion measures, for all-round protection, longer service life and less maintenance

- Anti-corrosion protection of fins (optional): gold fins with better anticorrosion performance;
- Anti-corrosion protection of sheet metal parts, chassis and footings (standard): Polyester powder is used as the protection of spraying plastics;
- Protection and corrosion prevention of compressor (standard): Black needled felt sound insulation cotton is used to improve the protection of compressor;
- Phosphating treatment of motor (standard): The rotating shaft of motor receives the treatment of phosphating on the surface, which effectively prevents salt spray corrosion;
- Anti-corrosion protection of the side plates of condenser and evaporator (standard): hot galvanized plate with better anti-corrosion performance;
- Anti-corrosion protection of pipes (optional): epoxy zinc phosphate coating, served as a protective film on the surface of the pipes;

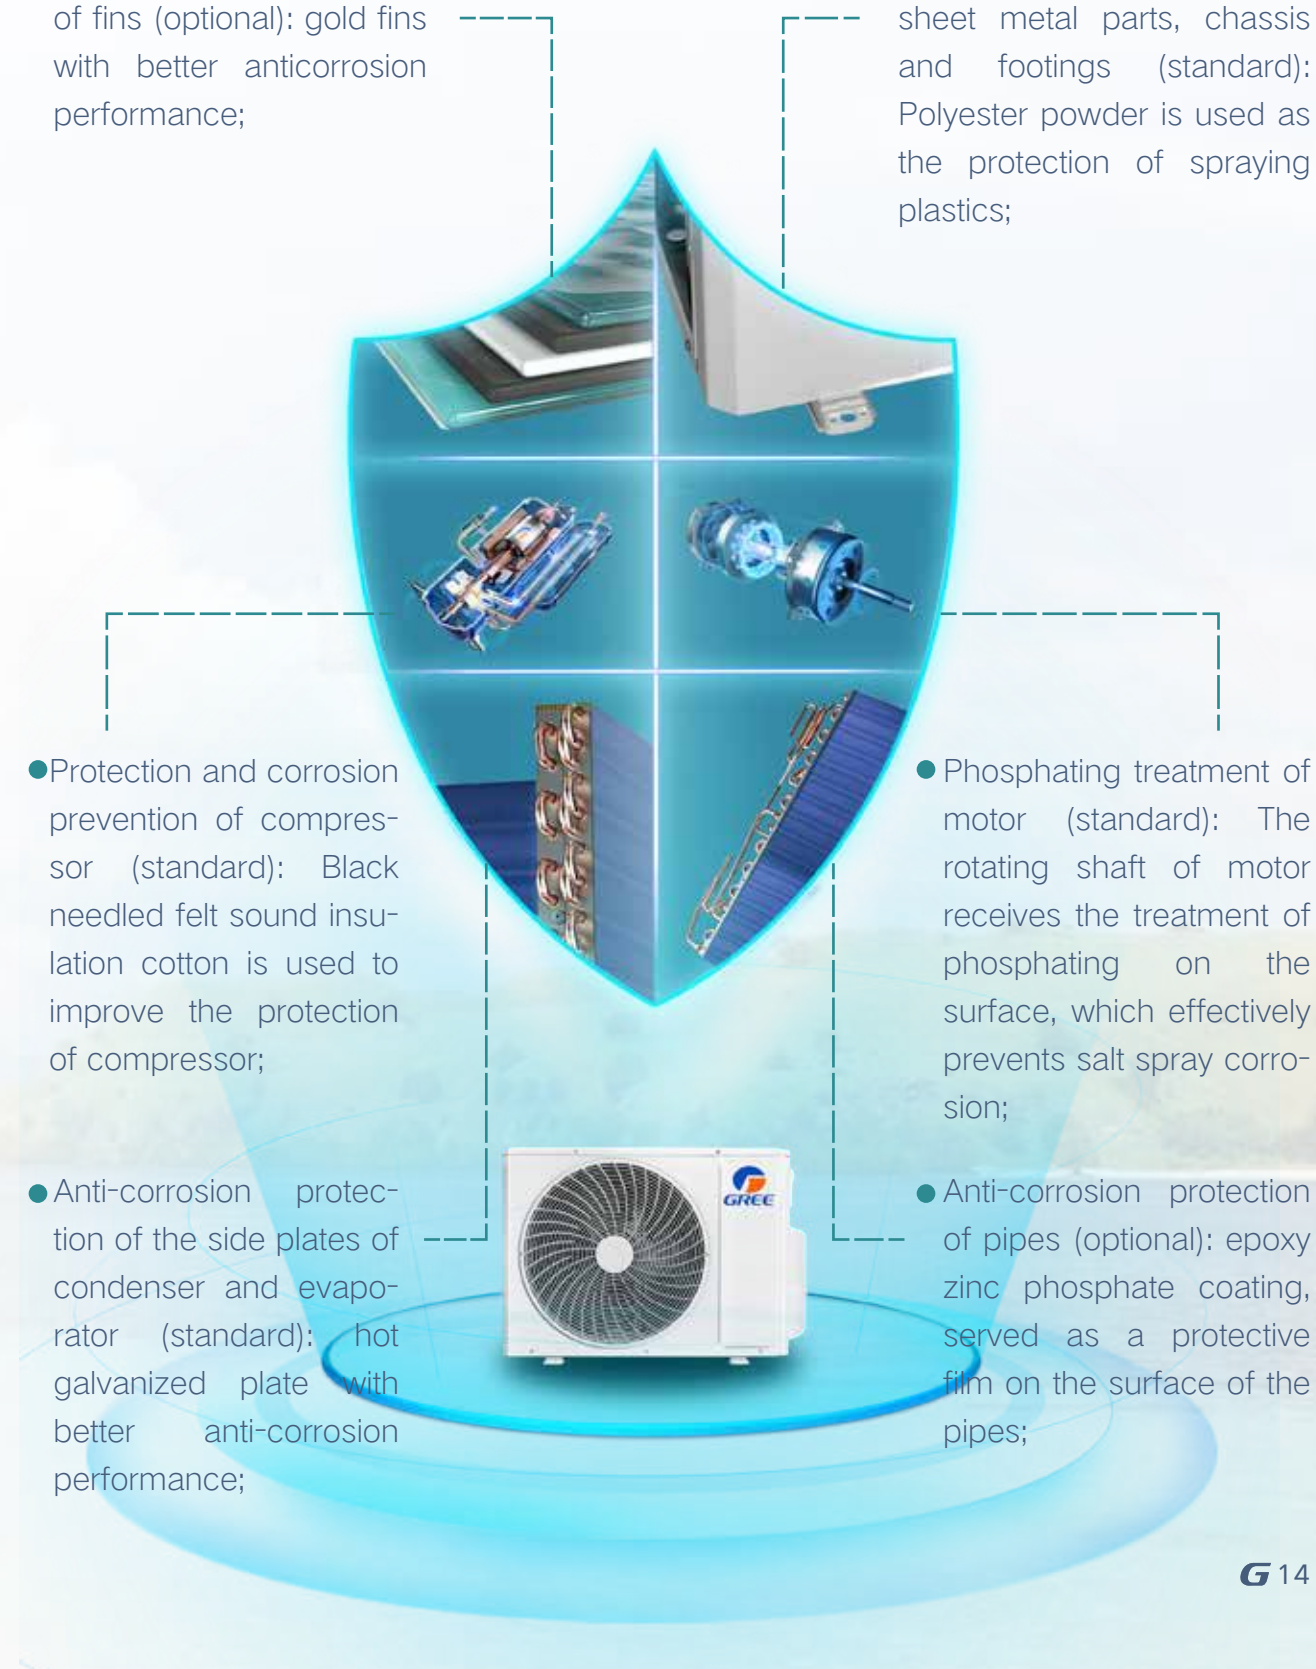

2 in 1 Dehumidifier: Dehumidification and Purification

High Energy Efficiency, Intelligent Dehumidification



Strong technology, powerful dehumidification

High quality rotary compressor has higher efficiency and lower noise when compared with traditional piston compressors. Besides, it is more reliable and durable. It can provide users with quiet and efficient dehumidification.



- The dehumidification capacity reaches 30L / D
- Applicable area: 42 ~ 54 m²
- Stable operation at 1 °C ~ 40 °C

Triple Purification, Enjoy Fresh Air of the Forest

Two filter screens

Air filter screen

First protection: The washable and durable filter screen can remove coarse particles.



Two-in-one composite filter

It combines the HEPA filter with the activated carbon filter, which can effectively filtrate more than 95% of the fine particles in the air and absorb various harmful gas and peculiar smell.




UV bacteria prevention

LED ultraviolet lamp can emit strong ultraviolet light, which can effectively inhibit the growth of bacteria and viruses. At the same time, it has the advantages of small size, long life and no ozone generation.

Ion Purification

Through high-voltage electrode discharge, Verty can ionize the air and generate a large number of positive and negative ion guards H⁺ and O₂⁻, forming an army of plasma with a concentration of up to 3 × 10⁶ n/cm³. The plasma sterilizes the air and finally generates harmless substances such as water and restores the air to be just as fresh as that in the forest.

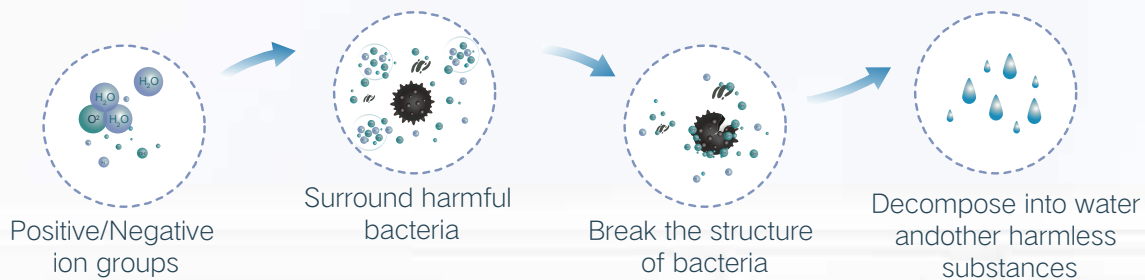

KEY FUNCTIONS

- Healthy and Clean Functions
- Efficient and Intelligent Functions
- Comfortable and User-friendly Functions
- Safe and Reliable Functions




Healthy and Clean Functions

Multiple Air Purification Technologies for Fresh Breath and Healthy Life

Multifunctional Filters

Nano Photocatalyst Filter


Nano photocatalyst filter is with nano dioxide and special active catalyst substances on the surface; so it can remove up to 95% of ammonia.

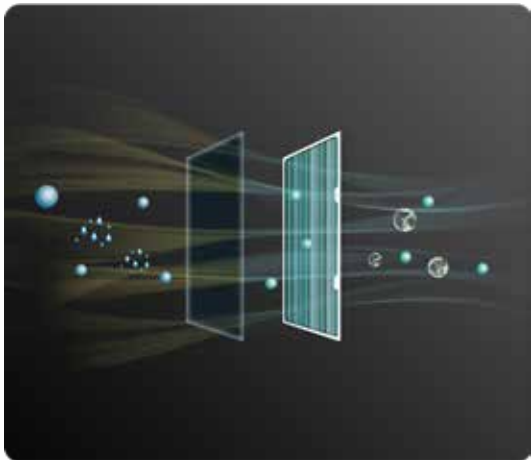


When the photocatalyst TiO_2 in the product contacts water or oxygen, it will react and finally produce hydroxyl radical ($-\text{OH}$) with high chemical activity. $-\text{OH}$ has strong oxidation ability and can react with harmful gases in the air to remove harmful gas pollutants.

HEPA Filter


The filter fiber reduces the filtration resistance, increases the dust capacity, and can effectively filter and remove of dust particles and bacteria above 0.3 microns in the air. Therefore, the filter can purify the air and keep the air fresh. Also, the filter can purify liquid and do the oil treatment.

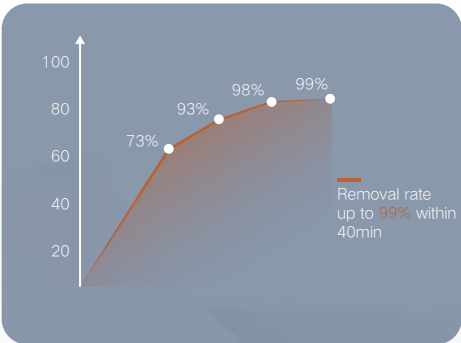

Note: Data sourced from Test Report 20-30-1356-12004; test condition: 40~60% (RH), 23~27°C(T)

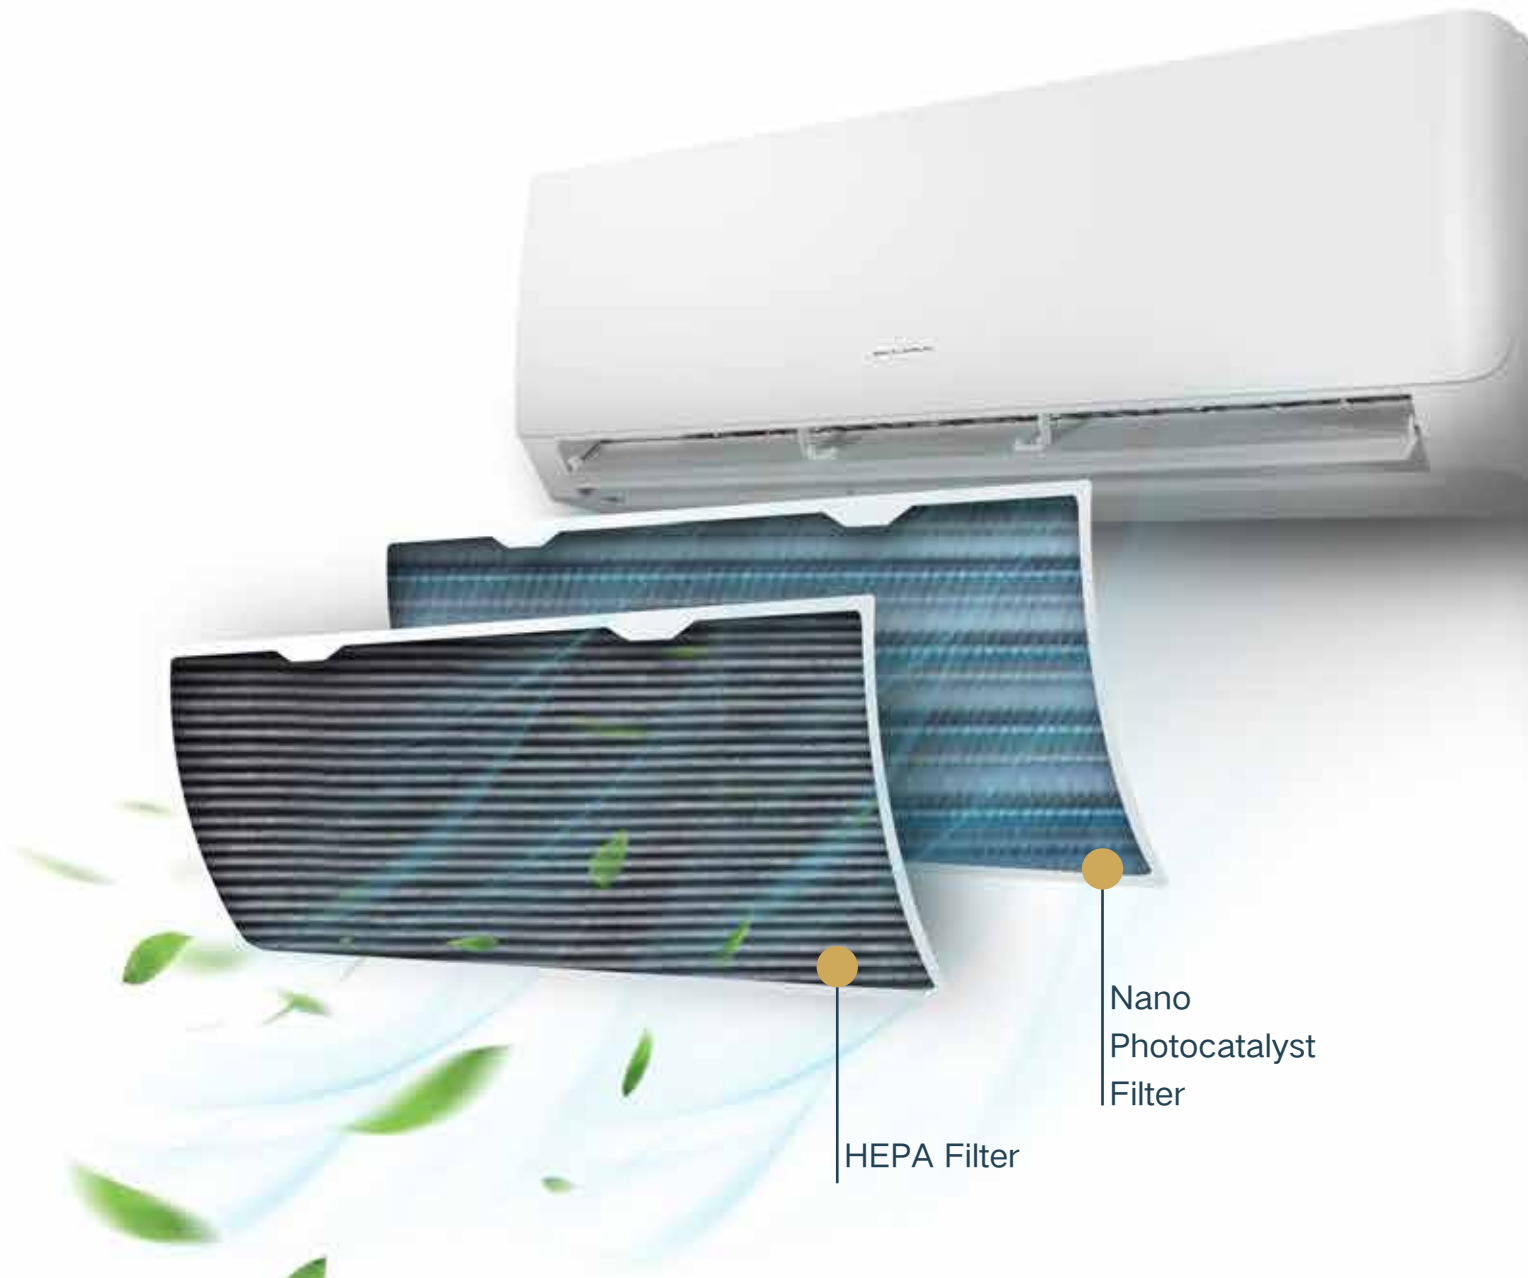


Other Filters




Silver ion filter
The antivirus rate of Staphylococcus aureus and Escherichia coli is over 95%



Catechin filter
The antivirus rate of Staphylococcus aureus and Escherichia coli is over 95%



Formaldehyde removal filter
Remove formaldehyde and hydrogen sulfide



Acaro bacterium filter
Effectively remove mites.




Chitin filter
Effectively prevent corrosion



C Vitamin C filter
Create a healthy and comfortable space

UVC Sterilization

Use UVC to continuously irradiate the evaporator and the air passing through it to effectively remove multiple bacteria for comprehensive and efficient sterilization.

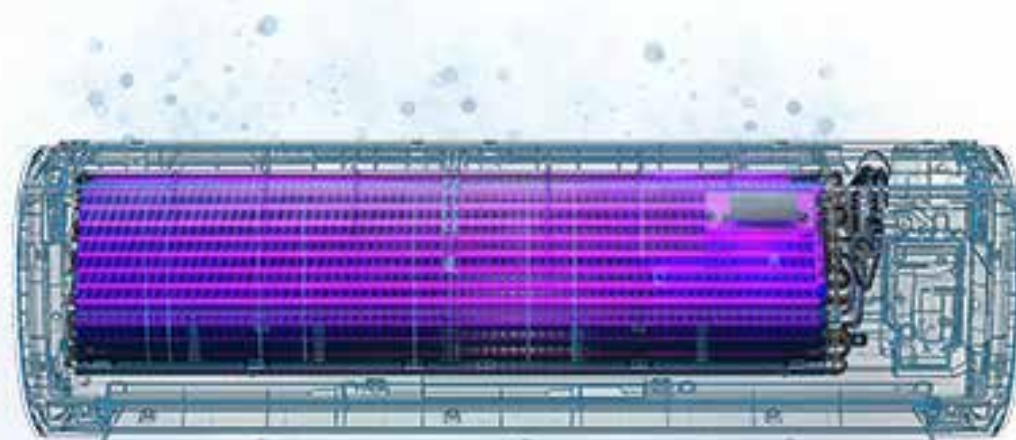

92.96%

Serial No.1

95.05%

Serial No.2

93.72%

Serial No.3

Average death rate reached **93.91%**



Low power sealed UV lamp, safe and efficient

No ozone: The ultraviolet band of Gree UVC sterilization lamp is 270~280 nanometers, no photochemical smoke, ozone and other poisonous gas.

Sealed leakage prevention design: UVC lamp is placed at the position exposed to the evaporator directly to prevent the injury caused by the ultraviolet ray as well the aging of injection molded parts.

Low power LED ultraviolet light source: UVC-LED ultraviolet light source is non-toxic, convenient for operation and high-efficiency, which can effectively reduce the risk of hazards to human body for long-term exposure.

*Note: This data is from test report 2022FM00272R01.

Self-Cleaning

It is annoying that the evaporator is very easy to accumulate dust and bacteria. While Gree evaporator auto clean technology adopts five steps of “condensation, frosting, defrosting, drying and 50-55°C sterilization” to keep the evaporator clean for fresh air supply.



Note: Cooling-only units have four steps-----condensation, frosting, defrosting and drying; cooling and heating units have five steps-----condensation, frosting, defrosting, drying and 50-55°C sterilization.

Efficient and Intelligent Functions

Multiple Smart Controls for Your Smart Life



Key-card Control - Air Conditioner Starts When the Door Opens

How to enjoy the comfortable temperature immediately when you are back indoors? It can be realized with only one door card.

Gree air conditioner is equipped with Key-card Control function. By swiping your door card, the Key-card Control function will control the switch of the unit; when the door card is removed, the air conditioner will still keep working for 6mins and then be in standby state automatically.

No need remote controller to turn on the air conditioner, comfortable and convenient.



Note: This function is available for some models

Wifi Bluetooth efficient networking

Air conditioner is equipped with Wifi Bluetooth efficient networking function, which can automatically connect to the network and find nearby devices. Compared with traditional Wifi links, it improves the success rate of networking and reduces the networking steps, effectively improving the operation convenience and reliability of the product.

Search
nearby devices

Confirm home WiFi

Connect the device

Network is connected

Building Management System

Smart Centralized Control, Easy to Control Multiple Units at the Same Time

By adopting Gree smart centralized controller, centralized control of on/off, mode, temperature and timer for 36 units at the most can be realized.

For large hotels, shopping malls, parking lots and other similar areas, centralized control of up to 255 devices can be realized by using BMS-Building Management System.



*Common household wired controllers XK76 and XE71 are compatible with centralized controllers CE52 as well as BACnet building control.

Comfortable and User-friendly Functions

Multiple Smart Controls for Your Smart Life

Surfing Louver, All-round Cool

Fully-closed motional large air louver



► Turbo Direct-Cooling Mode

Airflow has increased by 10%

► Air Supply from Long Distance is up to 15.5m

Realize big air circulation in the room

► Larger Air Swing Angle

User can define the air direction

2-mode Air Delivery

Airy not only excels in delivering superior airflow technology but also takes user experience to the next level by optimizing every detail for “unmatched comfort”.

► No direct air draught whether near or far

Mode 1 “↶” for near field

The Surfing Louver is slightly adjusted upwards, causing the cold air to flow along the wall and avoid blowing directly at people, providing a gentle and healthy cooling experience.




Mode 2 “↷” for far field

The Surfing Louver is horizontally adjusted to allow the cold air to sink from a higher position, preventing discomfort from direct blowing at close distances.



Fast Cool

Under fast cool mode, room temperature can be reduced quickly and you can feel cool and comfortable in only a few minutes. However, 20min later, the temperature and fan speed will resume previous setting state, energy-saving and comfortable.

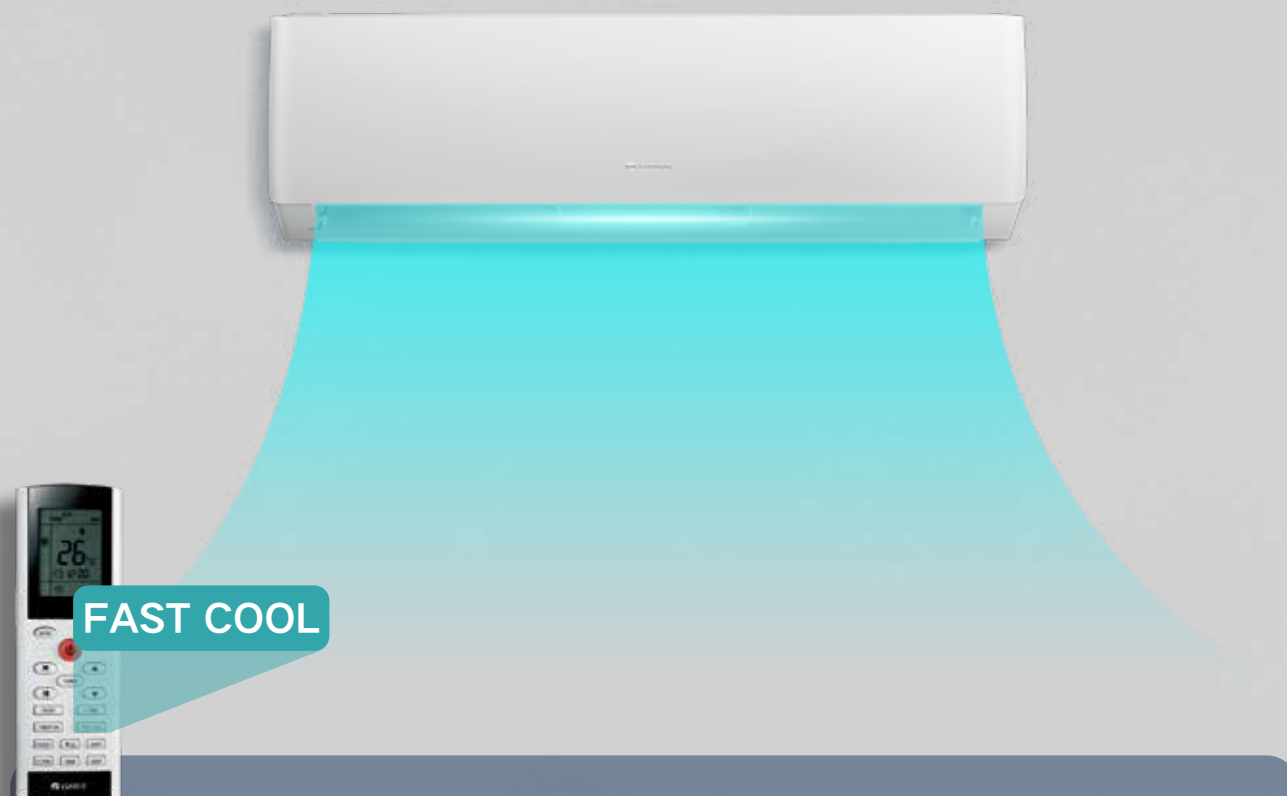

Tips for Fast Cooling Function

- Press "**FAST COOL**" button to turn on fast cooling mode.
- Press it once, the default temperature is **25°C(77°F)**, and the remote controller flashes for 5s. Press it twice, the default temperature is **16°C(61°F)**, and the remote controller flashes for 5s.
- In the flashing period, press "**▲**" or "**▼**" button to adjust the temperature. Press "**FAN**" button to adjust the fan speed. When flashing is over, the unit operates at the set temperature and fan speed.
- 20 minutes later, it will resume to the set temperature and the fan speed before fast cool mode setting.

3D Airflow

The air guide louver can not only automatically swing up and down, but also left and right. It enables 3D airflow for wider air supply to enhance the comfort.



I-Feel Mode

Do you always feel hot or cold when the unit has operated for a period of time? Is it very troublesome to adjust the temperature frequently? Now I-Feel function can solve this problem for well. One button for you to enjoy the comfortable life.

Once I-Feel function is turned on, temsor temperature sense technology adopted by the remote controller can intelligently detect the temperature around you. It automatically sends the information to the unit every 10min and then the unit will automatically adjust the temperature.



7 Fan Speeds

Fan speed can be adjusted by a remote controller. These 7 fan speeds (quiet/ low/ low-medium/ medium/ medium-high/ high/ turbo) can satisfy various requirements. Turbo fan speed can quickly adjust room temperature, enabling you to feel the coolness immediately, while quiet fan speed enables you to enjoy the comfort quietly.



Adjustable Temperature under Auto Mode

Once auto mode is set, the unit can automatically adjust the temperature basing on the detected temperature. No need to switch cooling or heating mode when there is big temperature difference.




Safe and Reliable Functions

Various reliable design ensure products quality and reliability

Golden Fin

The unit adopts high-end golden fin with five-layer sealing coating for high-efficiency and long-lasting protection; it's with features of super hydrophilicity, weather resistance, acid rain resistance, UV protection, corrosion resistance, wind erosion resistance, high temperature resistance and so on.

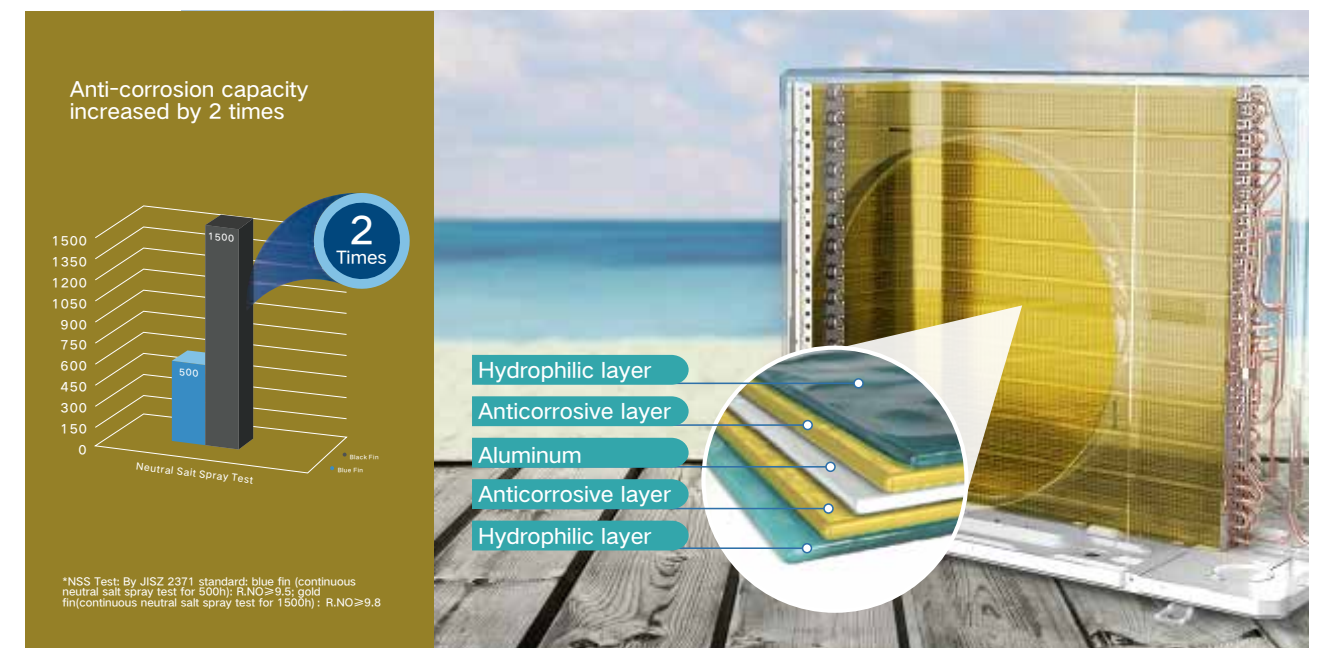

Self Diagnosis

Once abnormal operation or part failure happens, the unit will shut off automatically to protect the system. Meanwhile it will display protection or error code for fast service.




Nomal display




Open/Short circuit of ambient temperature sensor: Dual-8 display shows **F1**



Open/Short circuit of outer tube temperature sensor: Dual-8 display shows **F4**




Open/Short circuit of inner tube temperature sensor: Dual-8 display shows **F2**



Overload protection: It will display **H3** (See overload protection function for more details)

If multiple errors happen at the same time, the corresponding error/protection codes will be displayed in turn

Simple Installation and Maintenance Offer You Worry-Free Use

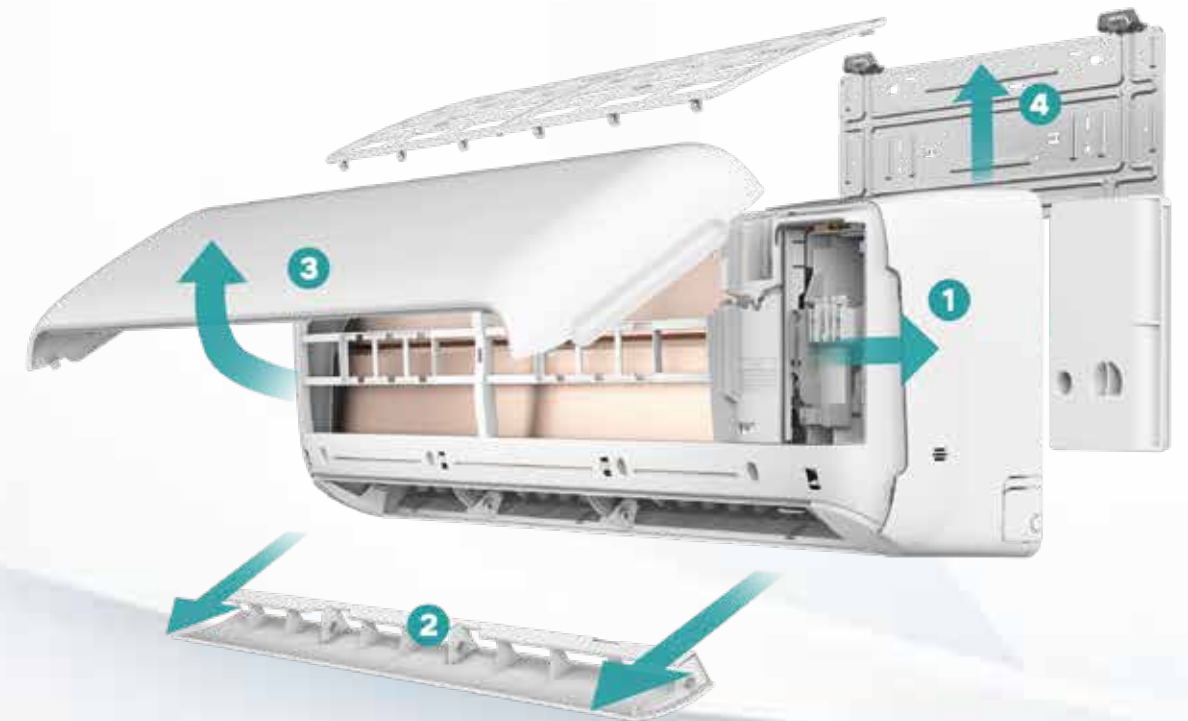


- ① Quick mainboard disassembly design enables easy disassembly and maintenance by opening the panel only;
- ② Air outlet is easy to remove for washing;
- ③ Integrated overhead filter can be disassembled directly for cleaning, no need to disassemble the unit;
- ④ English installation scale available*; clasp is enlarged to increase the pipe connection space for the convenience of installation

Note: This function is optional

Icon Interpretation RAC

◆ Comfortable and User-friendly



3D Airflow

The air guide louver can not only automatically swing up and down, but also left and right. It enables 3D airflow for wider air supply to enhance the comfort.



8°C Heating Mode

Under heating mode, the unit operates at 8°C to ensure constant room temperature for maintaining comfort and saving energy.



Fast Cool

Under Fast Cool mode, the temperature in the room will be decreased quickly; 20min later, the temperature and fan speed will resume their settings in the previous cooling state.



Adjustable Temperature under Auto Mode

Once auto mode is set, the unit can automatically adjust the temperature basing on the detected temperature. No need to switch cooling or heating mode when there is big temperature difference.



Quiet Design

Indoor unit operates at ultra low fan speed under this mode for the lowest noise, offering you a quiet environment for study and working.



Comfortable Sleeping Mode

The unit slowly increases (cooling) or decreases (heating) the set temperature to satisfy the sleeping demand of users.



Vertical Auto Swing

The unit can automatically swing up and down to enhance the comfort



Horizontal Auto Swing

The unit can automatically swing left and right to enhance the comfort.



24-hour Timer

Timer: You can set the start and stop time by the remote controller, such as stop after 1.5h or start after 1.5h. (The setting can only take effect once)



Two-stage Compressor

Under low temperature, the capacity of two-stage compress can be improved by 20%



7 Fan Speeds

Fan speed can be adjusted by a remote controller. Turbo fan speed can instantly change the room temperature, enabling you to feel the coolness immediately, while quiet fan speed enables you to enjoy the comfortable temperature quietly.



Long Air Supply Distance

Ultra-long-distance airflow delivery, bringing comfort to every corner.




I-Feel

Do you always feel hot or cold when the unit has operated for a period of time? Is it very troublesome to adjust the temperature frequently? Now I-Feel function can solve this problem for well. One button for you to enjoy the comfortable life.



Three Sleep Modes

The unit slowly increases (cooling) or decreases (heating) the set temperature to satisfy the sleeping demand of users.



8°C~30°C Adjustable Heating Mode

The temperature can be adjusted from 8°C to 30°C in heating mode, the ultra-wide adjustable temperature range can bring more comfortable experience to our customer.



Multiple Fan Speeds

The unit has 4 or 3 fan speeds--quiet, low, medium, high, which can satisfy various requirements.



Clock Timer

Clock: You can set a certain time to start and stop by the remote controller, such as turn on the unit at 13:38 or turn it off at 16:38. (The setting can take effect before the next setting)



Dry Mode

The air conditioner has dehumidification function and it can dehumidify during operation, which is convenient and fast.



Independent Smart Dehumidification

Airy can operate according to the humidity set by the user. It is specially designed with the continuous dehumidification function, which can meet the daily need for drying clothes.



Avoid Direct Airflow to People

Airflow to people is prevented - the cool air blows upward along the wall and then sinks, providing natural cooling for you.



Turbo

In cooling or heating mode, press "Turbo" button on the remote controller for big air flow, which enables indoor temperature to reach the set one in a short time.



Auto Restart

If the power supply is suddenly disconnected during the operation of air conditioner, the unit will save the operating state. After power recovery, it will automatically start and maintain the operating state before the power failure.



Heating for 10h without Shutdown

Shortens the defrosting time of outdoor unit, reduces indoor temperature fluctuation and enables continuous heating for 10 hours without a stop.

Icon Interpretation RAC

◆ Convenient



LED Display

LED display can display clearly in front of a light source.



Key-card Control

Gree air conditioner is equipped with key-card control function. Swiping the key-card can turn on the air conditioner; when the card is removed, the unit keeps working for 6mins and then stops operation.



Two Modes of Buzzer Adjustable

The volume and the indication sound of the buzzer can be adjusted, no worry for disturbing daily life.



Auto Light Sensor

The air conditioner can automatically sense the change of light in the environment and then intelligently adjust the display brightness.



Wired Control

Gree smart centralized controller can control on/off, mode, temperature and timer of 36 unit at the most in a centralized way.




Concealed Handles

Concealed handles for easy movement



Anti-cold

First heating and then blowing for cold air prevention, more comfortable



Universal Castors

Universal castors for easy movement



Easy Installation and Maintenance

The air conditioner can be disassembled directly for cleaning and maintenance, and it's easy for installation.

◆ Intelligent Control



Off-line Voice Control

It can turn on or turn off the unit, and adjust the temperature, operation mode and swing mode by voice control.



Efficient Bluetooth Distribution Network

Using Bluetooth flash configuration, devices can automatically find nearby network connection, improve the success rate and reduce the steps of distribution network.



Wifi Control

Achieve long-distance control of unit on and off, temperature and fan speed, etc. by APP in the mobile phone and wifi.



Smart Voice Control

Smart voice control is available; Google Assistant or Amazon Alexa are compatible.

◆ High-efficiency and Energy-saving



3DC Inverter

3DC inverter includes DC inverter compressor, high chamber and high-efficient DC motor, with superior performance.



G-AI Energy-saving Technology

Air conditioners with G-AI energy-saving technology can learn environmental changes and customer needs dynamically, always implement the optimal control strategy to achieve energy saving and comfort.



Power Gear Control

There are three gears for the power reduction function. Air conditioners can operate stably and reliably under different power output statuses at the areas with requirements for power limitation and energy conservation.



Intelligent Defrosting

The unit can intelligently detect the frosting status and conduct defrosting rapidly to improve the heat dissipation efficiency.



High Efficiency


The air conditioner is designed to high energy efficiency and to realize power saving.



Anti-corrosion Evaporator

After high-temperature curing, the eco-friendly water-based coating will form a dense and low-porosity organic film on the surface of the substrate, which can effectively isolate common corrosives in the air.

Icon Interpretation RAC



G-Boost Inverter Compressor

Stable cooling of compressor even at a high temperature of 68 ° C



MiniERV


Full Heat Exchange Two-way Ventilation. MiniERV (Mini Energy Recovery Ventilation) adopted innovative total heat two-way ventilation system. There is only heat exchange, ensuring air quality and satisfactory temperature.



ODU Self-cleaning

Cooling only units achieve self-cleaning through reverse running of the fan; heat pump units achieve self-cleaning through reverse running of the fan, condensation, frosting and defrosting. The cleaner the outdoor unit, the better the cooling effect and energy saving.

◆ Healthy and Clean



Multi-functional Filters

Photocatalyst filter, HEPA filter, catechin filter, activated carbon filter, silver ion filter, etc.



Colasma Air Purification Technology

The cold plasma device generates positive and negative ions to kill the bacteria and then decompose them into water.



X-fan

The cross fan continuous to blow to dry the inner side of indoor unit when the unit is turned off for keeping it clean and healthy.



IDU Self-cleaning

Condensate water mixes with the dust, and then the dust will be removed through defrosting ; after that, the temperature is increased to dry the evaporator for preventing the mildew and keeping the air clean.



Real-time Monitoring of Air Quality

With a built-in dust sensor and 4-color light display, the unit can show the air quality of your room.



Filter Cleaning Reminder

When the filters need to be cleaned, the dehumidifier or window air conditioner will automatically remind the user.



UV

LED ultraviolet lamp can emit strong ultraviolet light to inhibit the growth of bacteria and viruses. It has the advantages of small size, long life and no ozone generation.



Ventilation

Indoor and outdoor air exchange for fresh indoor air

◆ Safe and Reliable



5-level Washing Water-electricity Separation

All ventilated components can be disassembled and washed, including filter, swing mechanism, air outlet, fan blade, water channel and evaporator. All above are components without electricity, which are safe and reliable.



Wide Voltage Range

The unit can operate stably under a wide voltage range, which is suitable for the regions with unstable power supply.




Self-diagnosis

Once wrong operation or failure happens, the unit will shut off automatically to protect the system. Meanwhile, protections or error codes will be displayed for maintenance.



Refrigerant Shortage Protection

When the refrigerant is insufficient or the valve is blocked, indoor unit will display error code "F0 " and stop operation to protect the unit.



Anti-corrosion Fin

The anti-corrosion fins adopt special anti-corrosion materials; corrosion resistance and acid resistance of air conditioner will be reinforced under the humid environment.




Low Voltage Startup

The AC or dehumidifier can be normally started up even the voltage is 10% lower than the normal one, safe and stable.



Fire-proof Electric Box

Electric box adopts new BMV fireproof material, safe and reliable.



Anti-corrosion Protection of Outdoor Unit

Chassis, panel, side plate and top cover are sprayed with electrostatic powder to against the neutral salt spray.

Icon Interpretation

RAC



It can bear 1000h neutral salt spray test, much safer and more reliable.

3-layer Coating Protection for the Main Board



Epoxy zinc phosphate coating served as a protective film on the surface of the tubes.

Anti-corrosion Protection of Tubes



The dehumidifier has the function of auto fan, enables you to enjoy the dry and cool life at the same time.

Auto Fan



Display the humidity on time to get the environment more quickly.

Humidity Display



The rotation speed of inverter compressor increases step by step at the time of startup to prevent the power grid from excessive fluctuation for increasing the startup safety.

Soft Start



When Child Lock function is activated, misoperation from children will be avoided. Potential risks can also be avoided.

Child Lock



If the evaporator is frosted, the dehumidifier can defrost automatically and continue to run.

Intelligent Defrosting



Button-touch button instantly starts the sensory world, which brings excellent experience to consumers.

Touch Control



The Intelligent Auto-Restart function can start up each air conditioner with the starting time of second difference, so as to avoid the impact on the power grid

Intelligent Auto-restart



Compared with the traditional drainage by chassis, the high drop continuous drainage is more convenient for the installation of drainage pipes and the discharge of condensate water.

Continuous Drainage



The dehumidifier can preset dehumidification 24h in advance.


24h Preset



You can drain easily by removable water tank.


Removable Water Tank

◆ Dehumidifier




Dehumidifier can always be in continuous dehumidification state, without fear of environmental humidity changes.

Continuous Dehumidification




Low temperature dehumidification and stable operating under 2°C.

Low Temperature Dehumidification




When the filters need to be cleaned, the dehumidifier or window air conditioner will automatically remind the user.

Filter Cleaning Reminder




When the water tank is full, the dehumidifier will give an alarm and remind users to drain water.

Water Full Indicator




Touch sound can be turned off by pressing the button to ensure comfortable sleep.

Beep




External drain connector, not to worry about leakage after pulling out the hose.

External Drain Connector



After the dehumidifier conducts fast drying and completes the drying, the indoor humidity will be kept in a certain degree to prevent clothes from mildewing.

Turbo Boost Clothes Drying System




























The dehumidifier has the function of air flow, you can enjoy the dry and cool life at the same time.

















Air Flow




















FUNCTIONS GUIDE

WALL-MOUNTED TYPE

															
Airy		✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
S-cool		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				
Soyal		✓	✓	✓	✓	✓	✓		✓	✓	✓			✓	
Clivia		✓	✓	✓	✓	✓	✓		✓	✓	✓	Optional	✓		
G-Tech		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	
Fairy		✓	✓	✓		✓	✓	✓	✓	✓	✓	Optional	✓		
Pular		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	Optional	✓		
Cosmo		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Charmo		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Aphro			✓	✓		✓	✓	✓	✓	✓	✓	Optional	✓		✓
Console			✓	✓	✓	✓	✓	✓	✓	✓	✓		✓		



FLOOR-STANDING TYPE













															
I-Shine		✓	✓	✓		✓	✓		✓	✓	✓		✓		✓
T-Fresh		✓	✓	✓			✓	✓		✓	✓	✓	✓	✓	✓

																			
	✓	✓	✓	✓	Optional	✓	✓	✓		✓	✓	✓	✓	✓	✓	Optional	✓	✓	✓
	✓	✓	✓	✓	Optional	✓	✓	✓	Optional	✓	✓	✓	✓	✓	✓	Optional	✓	✓	✓
	✓	✓	✓	✓	Optional	✓	✓	✓	Optional	✓	✓	✓	✓	✓	✓	Optional	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	Optional	✓	✓	✓	Optional	✓	✓	✓	✓	✓	✓	Optional	✓	✓	✓
	✓	✓	✓	✓	Optional	✓	✓	✓	Optional	✓	✓	✓	✓	✓	✓	Optional		✓	✓
	✓	✓	✓	✓	Optional	✓	✓	✓	Optional	✓	✓	✓	✓	✓	✓	Optional	✓	✓	✓
	✓	✓	✓	✓	Optional	✓	✓	✓	Optional	✓	✓	✓	✓	✓	✓	Optional		✓	✓
	✓	✓	✓		Optional		✓	✓	Optional	✓	✓	✓	✓	✓	✓	Optional		✓	✓
	✓	✓	✓		Optional	✓	✓		Optional	✓		✓	✓	✓	✓	Optional		✓	✓

WINDOW TYPE















													
✓	✓		✓			✓	✓	✓		✓	✓	✓	✓

											
✓	✓	✓								Optional	Optional

PORTABLE TYPE



													
✓	✓	✓		✓	✓		✓	✓	✓	✓		Optional	✓


Optional



✓	✓	✓		✓	✓		✓	✓	✓	✓		Optional	✓
---	---	---	--	---	---	--	---	---	---	---	--	----------	---

Optional

















✓	✓			✓	✓		✓	✓	✓	✓		Optional	✓
---	---	--	--	---	---	--	---	---	---	---	--	----------	---

Optional

DEHUMIDIFIER



													
✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓

							
✓	✓	✓	✓	✓	✓	✓	✓



✓	✓	✓				✓	✓	✓	✓	✓			✓
---	---	---	--	--	--	---	---	---	---	---	--	--	---

✓	✓	✓	✓	✓	Optional	Optional	Optional
---	---	---	---	---	----------	----------	----------



✓	✓					✓	✓	✓	✓	✓			✓
---	---	--	--	--	--	---	---	---	---	---	--	--	---

✓	✓	✓	✓	✓	Optional	Optional	Optional
---	---	---	---	---	----------	----------	----------



✓	✓					✓	✓	✓	✓	✓			✓
---	---	--	--	--	--	---	---	---	---	---	--	--	---

✓	✓	✓	✓	✓	Optional	Optional	Optional
---	---	---	---	---	----------	----------	----------



✓	✓					✓	✓	✓	✓	✓		✓	✓
---	---	--	--	--	--	---	---	---	---	---	--	---	---

✓	✓	✓	✓	✓	Optional		
---	---	---	---	---	----------	--	--



✓	✓					✓	✓	✓	✓	✓			✓
---	---	--	--	--	--	---	---	---	---	---	--	--	---

✓	✓	✓	✓	✓	Optional	Optional	Optional
---	---	---	---	---	----------	----------	----------










✓	✓					✓	✓		✓	✓	✓	✓	✓
---	---	--	--	--	--	---	---	--	---	---	---	---	---

✓	✓	✓	✓	✓	Optional		
---	---	---	---	---	----------	--	--
















RECREATION VEHICLE















													
	✓	✓		✓	✓	✓		✓		✓	✓		✓

						
✓	✓	✓		✓		Optional

PRODUCTS OVERVIEW

WALL-MOUNTED TYPE		Capacity(Btu/h) Information	7000	9000	12000	18000	24000	Page
Airy		Inverter,R32						41
S-cool		Inverter,R32						43
Soyal		Inverter,R32						47
Clivia		Inverter,R32						47
G-Tech		Inverter,R32						49
Fairy		Inverter,R32						50
Pular		Inverter,R32						52
Cosmo		Inverter,R32						52
Charmo		Inverter,R32						53
Aphro		Inverter,R32						55
Console		Inverter,R32						55
FLOOR-STANDING		Capacity(Btu/h) Information	24000		48000		Page	
I-Shine		Inverter,R32						59
T-Fresh		Inverter,R32						61
WINDOW TYPE		Capacity(Btu/h) Information	9000		12000		Page	
Coolani		R32						65
PORTABLE TYPE		Capacity(Btu/h) Information	5000	7000	9000	10000	12000	Page
Aovia		On-Off,R290						69

Aolis		On-Off,R290	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	71		
Purity		On-Off,R290		<div></div>	<div></div>						72		
DEHUMIDIFIER		Capacity(Btu/h) Information	10	12	16	20	24	30	40	Page			
Verty		R290						<div></div>		75			
Aovia		R290	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>			77			
Aolis		R290	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>			78			
Aomi		R290			<div></div>	<div></div>	<div></div>			79			
Chalet		R290						<div></div>	<div></div>	80			
Granto		R290	<div></div>	<div></div>	<div></div>					81			
Petal		R290	<div></div>	<div></div>						82			
RECREATION VEHICLE AC		Capacity(Btu/h) Information	85000			90000			120000			Page	
Gocool		DC Inverter,R32				<div></div>			<div></div>			85	
		DC Inverter,R32	<div></div>						<div></div>				
LIGHT COMMERCIAL		Capacity(Btu/h) Information	12000	14000	18000	21000	24000	28000	36000	42000	46000	54000	Page
Free Match		Outdoor Unit, Inverter,R32		<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>			93
U-match		DC Inverter,R32	<div></div>		<div></div>		<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	98

WALL-MOUNTED TYPE

- Airy
- Soyol
- G-Tech
- Pular
- Charmo
- Console
- S-cool
- Clivia
- Fairy
- Cosmo
- Aphro





WALL-MOUNTED TYPE

Airy

Features: ☐ Standard ☐ Optional

I-Feel	24-hour Timer	Soft Start	Dry Mode	Turbo	Auto Restart	LED Display	7 Fan Speeds	Wifi Control
Intelligent Auto-Restart	UV	Key-card Control	Wired Control	Smart Voice Control	Child Lock	Intelligent Defrosting	Multi-functional Filters	Colasma Air Purification Technology
X-Fan	Continuous Dehumidification	IDU Self-cleaning	Anti-corrosion Fin	Wide Voltage Range	Fire-proof Electric Box	Anti-corrosion Protection of Tubes	Low Voltage Startup	Self-Diagnosis
Auto Fan	Refrigerant Storage Protection	Anti-Corrosion Protection of Outdoor Unit	3DC Inverter	Auto Light Sensor	Comfortable Sleeping Mode	Avoid Direct Airflow to People	Heating for 10h without Shutdown	Independent Smart Dehumidification
Long Air Supply Distance	Fast Cool							

Fully-closed motional large air louver

Air supply distance up to 15.5m

Air supply volume up by 10%

Large air swing angle

Anti direct blow

2-mode Air Delivery

Direct air supply in near field and far field is prevented for more comfort.

Mode 1 “” for near field



Mode 2 “” for far field



Continuous Heating Technology

Defrost logic based on frost growth and system parameter, so as to constantly keep heating during defrosting without shut down.

Room temperature fluctuation is smaller during defrosting (0.7~1.7°C Vs. 6~8°C)

Continuous heating: room temp drops by 1.5°C

Traditional defrosting: room temp drops by 6°C

10-hour continuous heating without a stop

Defrosting time about 2~3min (2~3min Vs. 8~12min)

Elegant Appearance



Vertical texture emphasizes the side layer and looks thinner.
Fully-closed air outlet design, dustproof and beautiful.

Simple tension design, square shape with rounded corners.
Partial silver plating embellishes drawing texture and creates space sense.




Injection molding etching and spraying process is adopted to simulate metal texture and embellish high quality life.



5 Colours

Multiple colors for your option
The best partner of high-end quality

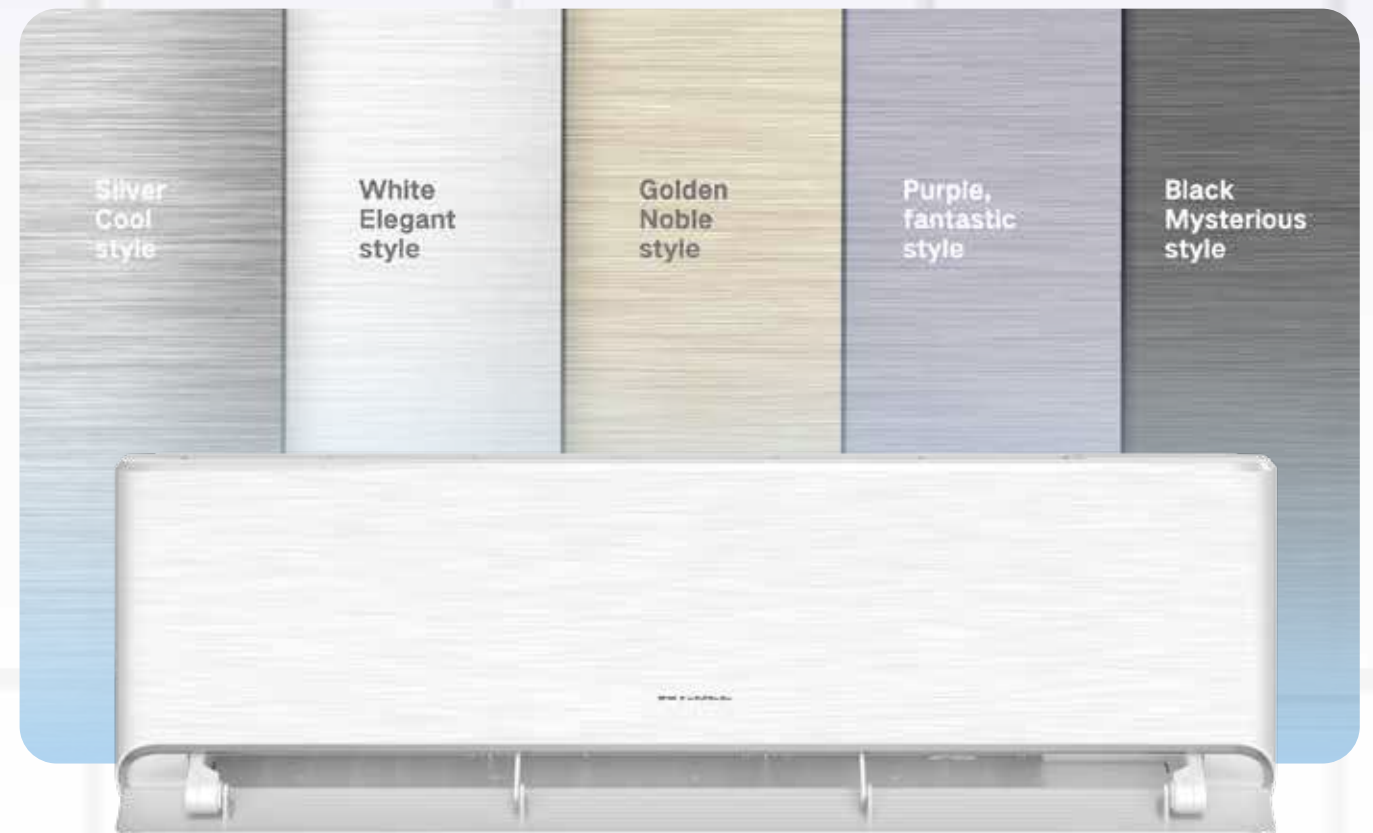
































WALL-MOUNTED TYPE

S-cool

Features: ☐ Standard ☐ Optional

 3D Airflow	 LED Display	 7 Fan Speeds	 Quiet Design	 24-hour Timer	 Clock Timer	 Child Lock	 Dry Mode	 Turbo
 Wifi	 Three Sleep Modes	 Auto	 I-Feel	 Intelligent Auto-restart	 Colasma Air Purification Technology	 X-Fan	 IDU Self-cleaning	 Auto Restart
 Wide Voltage Range	 Low Voltage Startup	 Self-diagnosis	 Fire-proof Electric Box	 Refrigerant Shortage Protection	 3DC Inverter	 Soft Start	 Anti-cold	 Multi-functional Filters
 Anti-corrosion Fin	 Anti-corrosion Protection of Outdoor Unit							

Soyal



Intelligent eye

Heat source sensing system with high-quality sensor in the industry.
The sensor has a built-in 8×8 matrix 64-pixel high definition infrared probe, which provides a mechanical rotation angle of 180 ° in detection period and an effective viewing angle of 120 ° .
High-precision detection enables precise control of the air conditioner.

Gree innovative heat source sensing air supply technology

Air supply follows people: In this mode, the air conditioner can automatically sense your position and adjust the swing angle. The air supply will follow people for rapid cooling.

Air supply follows people

In this mode, the air conditioner will automatically sense your position and adjust the airflow direction accordingly.



Air supply avoids people

In this mode, the air conditioner will automatically sense your position and adjust the airflow direction accordingly so as to avoid it from blowing directly to people.



Surrounded air supply

In this mode, the air conditioner swings automatically from left to right. When the air swings over the human body, it automatically accelerates to swing in an instant, and then slows down the speed, just like surrounded by the natural breeze.








Energy-saving operation when nobody in the room

Soyal's unique "unmanned energy saving" function* will automatically switch the unit to a low-frequency operation state to achieve energy saving when it detects that there is no one in the room.



Features: ☐ Standard ☐ Optional

							
3D Airflow	LED Display	7 Fan Speeds	Quiet Design	24-hour Timer	Child Lock	Dry Mode	Colasma Air Purification Technology
							
Turbo	Filter Cleaning Reminder	Three Sleep Modes	Auto	I-Feel	Intelligent Auto-Restart	X-Fan	IDU Self-cleaning
							
Auto Restart	Wide Voltage Range	Low Voltage Startup	Self-Diagnosis	Fire-proof Electric Box	Refrigerant Shortage Protection	3DC Inverter	Soft Start
							
Anti-cold	Efficient Bluetooth Distribution Network	Multi-functional Filters	Anti-corrosion Fin	Anti-Corrosion Protection of Outdoor Unit			



Features: ☐ Standard ☐ Optional

- | | | | | | | | | |
|-------------------------------|----------------------------------|---|--------------------|---------------------|-------------------------|------------------------------------|--------------------------|--|
| | | | | | | | | |
| G-AI Energy-saving Technology | 8°C~30°C Adjustable Heating Mode | Efficient Bluetooth Distribution Network | Power Gear Control | 3D Airflow | Quiet Design | 8°C Heating Mode | Three Sleep Modes | Adjustable Temperature under Auto Mode |
| | | | | | | | | |
| I-Feel | 24-hour Timer | Soft Start | Dry Mode | Turbo | Auto Restart | LED Display | 7 Fan Speeds | Wifi Control |
| | | | | | | | | |
| Intelligent Auto-Restart | UV | Key-card Control | Wired Control | Smart Voice Control | Child Lock | Intelligent Defrosting | Multi-functional Filters | Colasma Air Purification Technology |
| | | | | | | | | |
| X-Fan | Continuous Dehumidification | IDU Self-cleaning | Anti-corrosion Fin | Wide Voltage Range | Fire-proof Electric Box | Anti-corrosion Protection of Tubes | Low Voltage Startup | Self-Diagnosis |
| | | | | | | | | |
| Auto Fan | Refrigerant Storage Protection | Anti-Corrosion Protection of Outdoor Unit | 3DC Inverter | Auto Light Sensor | Fast Cool | | | |

Smart humidity control

It is the first time that Gree combines temperature, humidity and energy efficiency variables to form the optimal temperature and humidity curve of human body with energy saving, and select the most comfortable humidity range, so that comfort and energy saving can be available by the users at the same time.



Clothes drying function

Clivia is specially designed with the continuous dehumidification function, which can meet the daily need for drying clothes. User doesn't need to place a dehumidifier at home and just an air conditioner can achieve both cooling and clothes drying.



Humidity is controllable

Clivia can also operate according to the humidity set by the user, considerate for every special demand of the user.

Operation mode	Humidity setting range
Cooling mode	40~80%
Dehumidification mode	30~70%



Auto Light Sensor

Clivia has a built-in light sensor that automatically senses the light changes in the surrounding environment of the unit. It automatically increases the light during the day to make it clearly seen and decreases it at night to make it not irritating to eyes.




Two Modes of Buzzer Adjustable

The volume and the indication sound of the buzzer can be adjusted, no worry for disturbing daily life.

Colorful Appearances

Multiple colors are optional for different decoration needs.

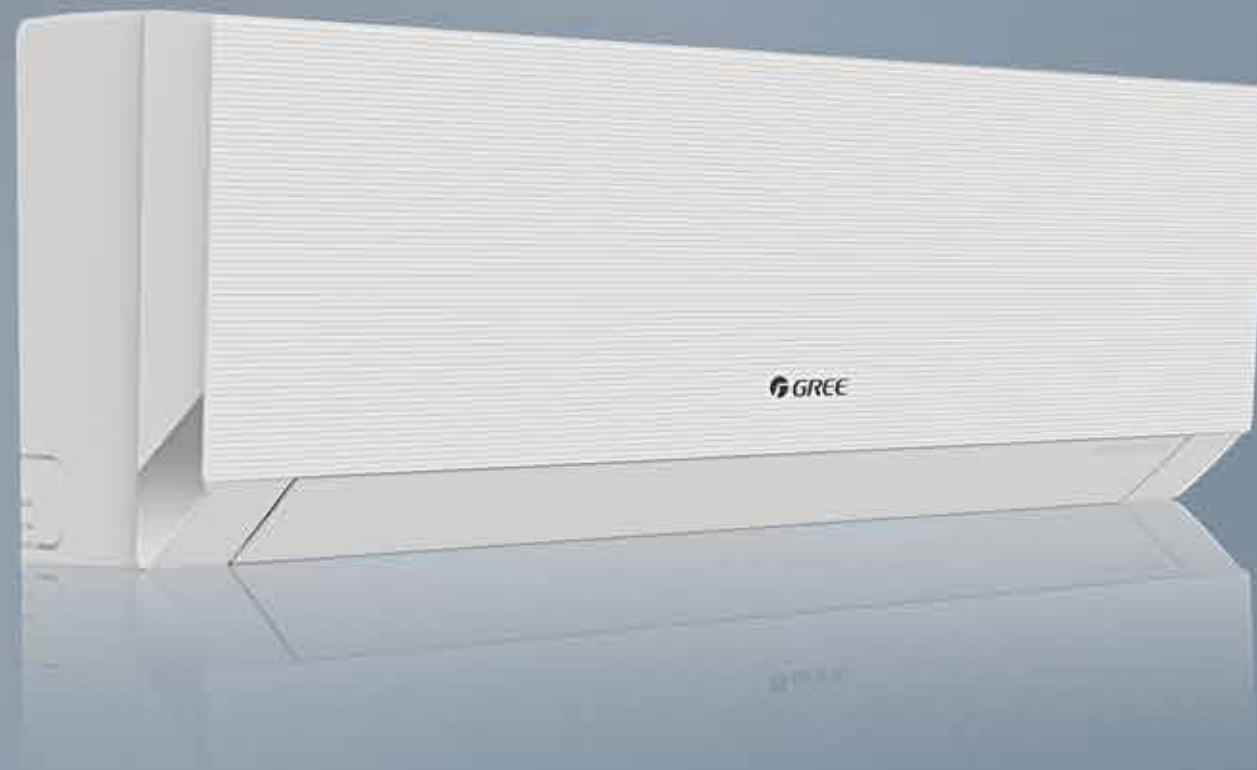

White



Silver



Champagne




Blue



Black



Distinctive stripe texture panel is adopted to improve the level.

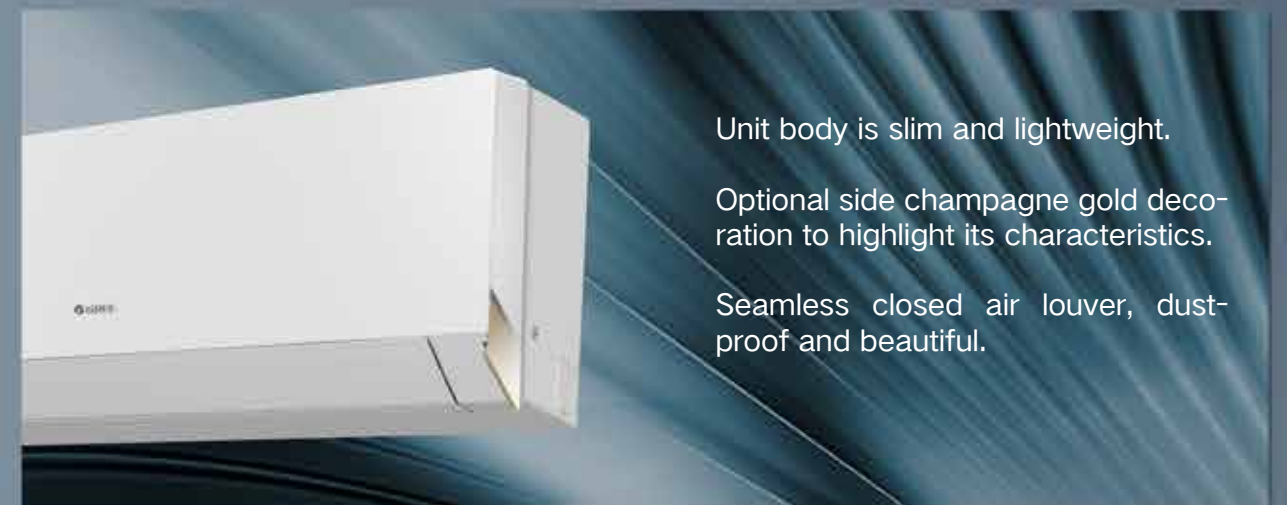


Unit body is slim and lightweight.

Optional side champagne gold decoration to highlight its characteristics.

Seamless closed air louver, dust-proof and beautiful.



Integrated external filter can be removed directly for cleaning, no need to disassemble the unit.

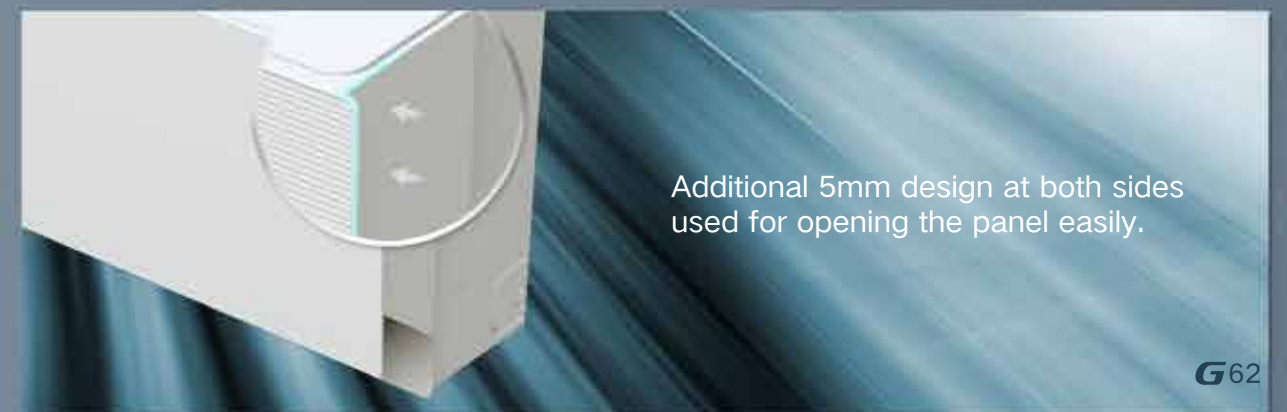


Additional 5mm design at both sides used for opening the panel easily.

All parts are removable and washable, the maintenance and replacement speed is much faster, which can greatly improve the efficiency.



Features: ☐ Standard ☐ Optional

LED Display	7 Fan Speeds	Quiet Design	24-hour Timer	Clock Timer	Child Lock	Dry Mode	Turbo
Wifi	Three Sleep Modes	Auto	I-Feel	Intelligent Auto-Restart	Colasma Air Purification Technology	X-Fan	IDU Self-cleaning
Auto Restart	Wide Voltage Range	Low Voltage Startup	Self-Diagnosis	Fire-proof Electric Box	Refrigerant Shortage Protection	3DC Inverter	Soft Start
3D Airflow	Filter Cleaning reminder	Anti-cold	Efficient Bluetooth Distribution Network	5-level Washing Water-electricity Separation	Multi-functional Filters	Anti-Corrosion Protection of Outdoor Unit	Anti-corrosion Fin

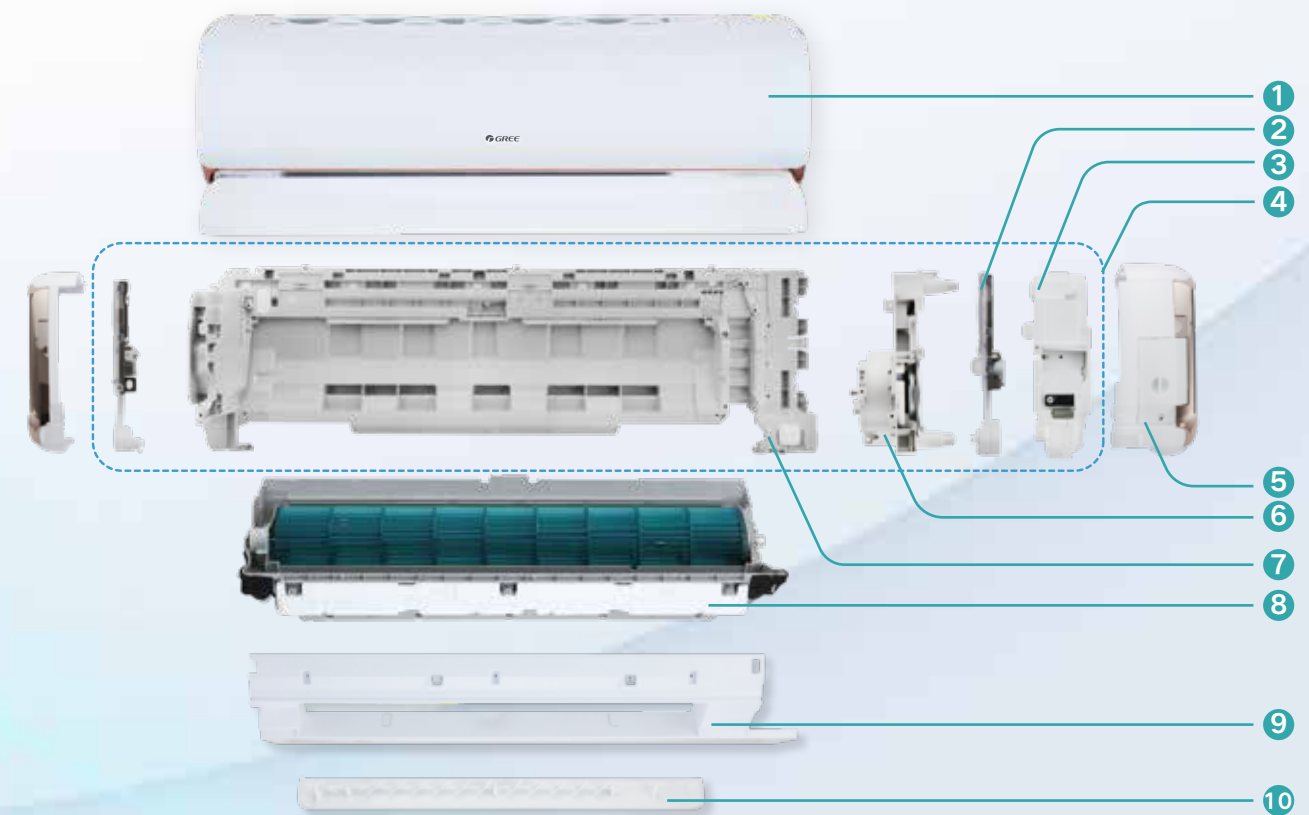

















- | | | | |
|--------------------------|---------------------|----------------|---|
| 1 Outer case | 2 Right drive case | 3 Electric box | 4 No electric parts involved in disassembly |
| 5 Right decorative board | 6 Motor base | 7 Base | 8 Water channel |
| 9 Air outlet | 10 Air guide louver | | |

Fairy











Features: ☐ Standard ☒ Optional

- | | | | | | | | |
|---|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |  |
| 3D Airflow | LED Display | Soft Start | Quiet Design | 24-hour Timer | Clock Timer | Child Lock | Dry Mode |
|  |  |  |  |  |  |  |  |
| Turbo | Wifi | Anti-cold | Three Sleep Modes | Auto | I-Feel | Intelligent Auto-Restart | Colasma Air Purification Technology |
|  |  |  |  |  |  |  |  |
| X-Fan | IDU Self-cleaning | Auto Restart | Wide Voltage Range | Low Voltage Startup | Self-Diagnosis | Fire-proof Electric Box | Refrigerant Shortage Protection |
|  |  |  |  |  |  | | |
| Efficient Bluetooth Distribution Network | Multi-functional Filters | Anti-corrosion Fin | Anti-Corrosion Protection of Outdoor Unit | Fast Cool | Low Watt Intelligent Energy Saving | | |

Pular



Features: ☐ Standard ☒ Optional

- | | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| 3D Airflow | LED Display | 7 Fan Speeds | Quiet Design | 24-hour Timer | Clock Timer | Child Lock | Dry Mode |
|  |  |  |  |  |  |  |  |
| Turbo | Wifi | Three Sleep Modes | Auto | I-Feel | Intelligent Auto-Restart | Colasma Air Purification Technology | X-Fan |
|  |  |  |  |  |  |  |  |
| IDU Self-cleaning | Auto Restart | Wide Voltage Range | Low Voltage Startup | Self-Diagnosis | Fire-proof Electric Box | Refrigerant Shortage Protection | 3DC Inverter |
|  |  |  |  |  |  |  | |
| Soft Start | Anti-cold | Efficient Bluetooth Distribution Network | Multi-functional Filters | Anti-corrosion Fin | Anti-Corrosion Protection of Outdoor Unit | Fast Cool | |

Concise Appearance

Overall concise and elegant



Unique steamlined design.
Gentle and elegant.



The side of the unit is with
slight concave and texture,
so that the side step surface
can be used as a handle to
open the panel, realizing the
unity of shape and function.





























Streamlined air louver, with
longer air supply distance.

WALL-MOUNTED TYPE

Cosmo

Features: ☐ Standard ☐ Optional

 3D Airflow	 LED Display	 7 Fan Speeds	 Quiet Design	 24-hour Timer	 Clock Timer	 Child Lock	 Dry Mode	 Turbo
 Wifi	 Three Sleep Modes	 Auto	 I-Feel	 Intelligent Auto-restart	 Colasma Air Purification Technology	 X-Fan	 IDU Self-cleaning	 Auto Restart
 Wide Voltage Range	 Low Voltage Startup	 Self-diagnosis	 Fire-proof Electric Box	 Refrigerant Shortage Protection	 Soft Start	 Anti-cold	 3DC Inverter	 Multi-functional Filters
 Anti-corrosion Fin	 Anti-corrosion Protection of Outdoor Unit	 Fast Cool						



WALL-MOUNTED TYPE

Charmo

Features: ☐ Standard ☐ Optional



3D Airflow



LED Display



7 Fan Speeds



Quiet Design



24-hour
Timer



Clock Timer



Child Lock



Dry Mode



Turbo



Fast Cooling



Wifi



Three Sleep
Modes



Auto



I-Feel



Intelligent
Auto-Restart



Colasma
Air Purification
Technology



X-Fan



IDU Self-cleaning



Auto Restart



Wide
Voltage Range



Low
Voltage Startup



Self-Diagnosis



Fire-proof
Electric Box



Refrigerant
Shortage
Protection



Anti-Corrosion
Protection of
Outdoor Unit



Soft Start



Anti-cold



Efficient Bluetooth
Distribution Network



Multi-functional
Filters



Anti-corrosion
Fin





























Power Gear
Control

Aphro




























Features: ☐ Standard ☒ Optional

- | | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| LED Display | 24-hour Timer | Clock Timer | Child Lock | Dry Mode | Turbo | Comfortable Sleeping Mode | Auto |
|  |  |  |  |  |  |  |  |
| I-Feel | Intelligent Auto-Restart | X-Fan | IDU Self-cleaning | Auto Restart | Wide Voltage Range | Low Voltage Startup | Self-Diagnosis |
|  |  |  |  |  |  |  |  |
| Fire-proof Electric Box | Refrigerant Shortage Protection | Soft Start | Anti-cold | Wifi Control | Efficient Bluetooth Distribution Network | Multi-functional Filters | Anti-corrosion Fin |
|  |  | | | | | | |
| Anti-Corrosion Protection of Outdoor Unit | Fast Cool | | | | | | |

Console



Features: ☐ Standard ☒ Optional

- | | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| LED Display | 7 Fan Speeds | Quiet Design | 24-hour Timer | Clock Timer | Child Lock | Dry Mode | Turbo |
|  |  |  |  |  |  |  |  |
| Wifi | Three Sleep Modes | Auto | I-Feel | Colasma Air Purification Technology | X-Fan | Auto Restart | Low Voltage Startup |
|  |  |  |  |  |  |  |  |
| Self-Diagnosis | Fire-proof Electric Box | Refrigerant Shortage Protection | Soft Start | Anti-cold | Efficient Bluetooth Distribution Network | Multi-functional Filters | Anti-corrosion Fin |
|  | | | | | | | |
| Anti-Corrosion Protection of Outdoor Unit | | | | | | | |

FLOOR-STANDING TYPE

- I-Shine
- T-Fresh




I-Shine


Features: ☐ Standard ☐ Optional

FLOOR-STANDING TYPE

- | | | | | | | | | |
|---|---|--|---|---|--|--|--|---|
| 
3D Airflow | 
LED Display | 
LCD Display | 
Quiet Design | 
24-hour
Timer | 
Child Lock | 
Dry Mode | 
Turbo | 
Wifi |
| 
Comfortable
Sleeping Mode | 
Auto | 
Intelligent
Auto-Restart | 
X-Fan | 
Auto Restart | 
Wide Voltage
Range | 
Low Voltage
Startup | 
Self-Diagnosis | 
Fire-proof
Electric Box |
| 
Refrigerant
Shortage Protection | 
3DC Inverter | 
Soft Start | 
Anti-cold | 
Multiple Fan
Speeds | 
Multi-functional
Filters | 
Anti-corrosion
Fin | 
Anti-Corrosion
Protection
of Outdoor Unit | |

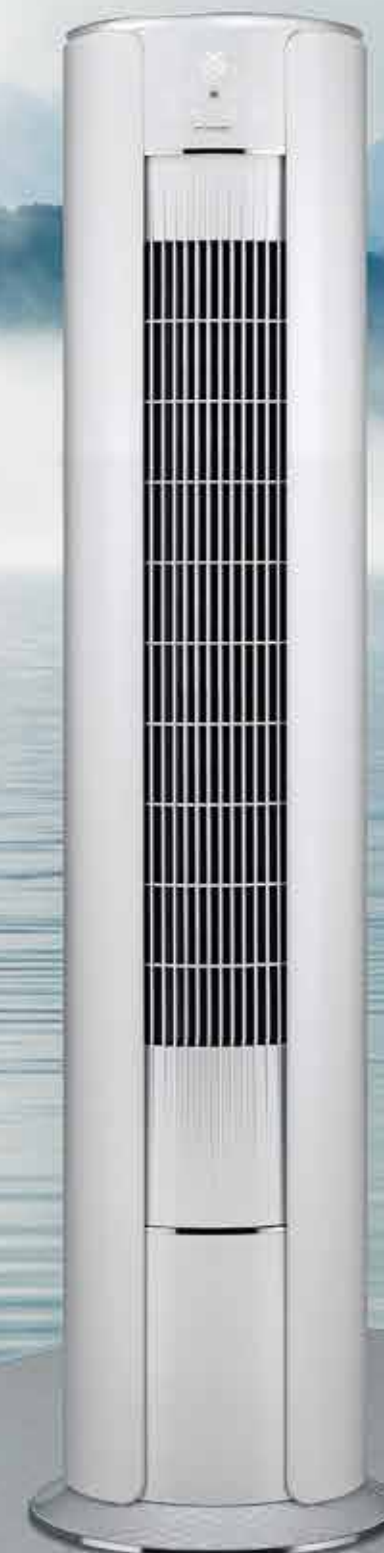

T-Fresh

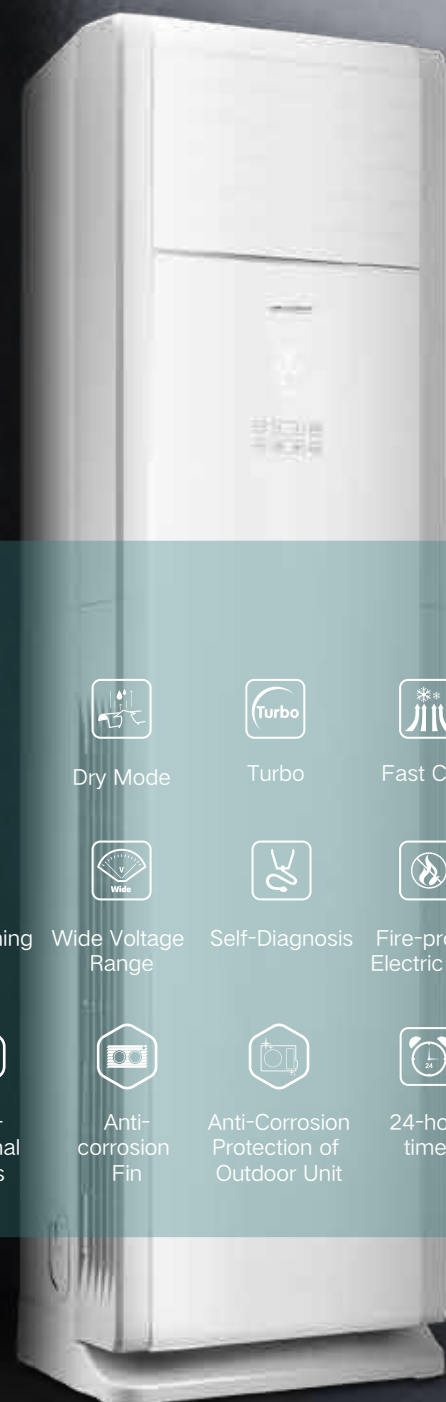

Features: ☐ Standard ☐ Optional

- | | | | | | | | |
|---|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |  |
| 3D Airflow | LED Display | LCD Display | Auto | Dry Mode | Turbo | Fast Cool | Wifi |
|  |  |  |  |  |  |  |  |
| Filter Cleaning Reminder | Comfortable Sleeping Mode | Intelligent Auto-Restart | Self-cleaning | Wide Voltage Range | Self-Diagnosis | Fire-proof Electric Box | Refrigerant Shortage Protection |
|  |  |  |  |  |  |  |  |
| 3DC Inverter | Soft Start | Anti-cold | Multi-functional Filters | Anti-corrosion Fin | Anti-Corrosion Protection of Outdoor Unit | 24-hour timer | X-Fan |

Fully-closed air outlet

The air outlet can be completely closed to avoid dust from entering, safeguarding the health of your family.



Side filter design

The filter can be drawn from one side. It is easy to detach and clean. Enjoy easy cleaning.



WINDOW TYPE


- Coolani





Coolani





Features: ☐ Standard ☒ Optional



Horizontal Auto Swing



LED Display



Multiple Fan Speeds



Comfortable Sleeping Mode



24-hour Timer



Dry Mode



Intelligent Auto-Restart



Auto Restart


Wide Voltage Range


Low Voltage Startup


Self-Diagnosis


Multi-functional Filters


Anti-corrosion Fin

PORTABLE TYPE

- Aovia
- Aolis
- Purity



Aovia













10k/12k



5k/7k/9k










Features: ☐ Standard ☐ Optional

 Auto	 Multiple Fan Speeds	 LED Display	 Dry Mode	 Comfortable Sleeping Mode	 Timer	 Self Diagnosis	 Auto Restart
 Easy Roll Casters	 Vertical Auto Swing	 X-Fan	 Multi-functional Filters				

Aolis

Features: ☐ Standard ☒ Optional

- 
Auto
- 
Multiple Fan Speeds
- 
LED Display
- 
Dry Mode
- 
Comfortable Sleeping Mode
- 
24-hour Timer
- 
Self Diagnosis
- 
Auto Restart
- 
Easy Roll Casters
- 
Vertical Auto Swing
- 
Multi-functional Filters
- 
X-Fan

*Vertical auto swing function is optional for 5k/7k/9k.




5k/7k/9k



10k/12k

Purity

Features: ☐ Standard ☒ Optional

- 
Auto
- 
Multiple Fan Speeds
- 
LED Display
- 
Dry Mode
- 
Comfortable Sleeping Mode
- 
24-hour Timer
- 
Self Diagnosis
- 
Auto Restart
- 
Easy Roll Casters
- 
Multi-functional Filters
- 
X-Fan



7k/9k

DEHUMIDIFIER

- Verty
- Aolis
- Chalet
- Petal
- Aovia
- Aomi
- Granto



Verty




















Features: ☒ Standard ☐ Optional

- | | | | | | | | |
|---|--|---|---|--|---|--|--|
| 
Humidity Display | 
Multiple Fan Speeds | 
Air Flow | 
Auto | 
Vertical Auto Swing | 
LED Display | 
Quiet Design | 
24-hour Timer |
| 
Self Diagnosis | 
Auto Restart | 
Intelligent Defrost | 
Water Level Display | 
Water Full Indicator | 
Water Overflow Protection | 
External Drain Connector | 
Removable Water Tank |
| 
Filter Cleaning Reminder | 
Easy Roll Casters | 
UV | 
Multi-functional Filters | 
Colasma Air Purification Technology | | | |

















Aovia

Features: ☒ Standard ☐ Optional

- 
Humidity Display
- 
Multiple Fan Speeds
- 
Air Flow
- 
LED Display
- 
Quiet Design
- 
24-hour Timer
- 
Self Diagnosis
- 
Auto Restart
- 
Intelligent Defrost
- 
Water Full Indicator
- 
Water Overflow Protection
- 
External Drain Connector
- 
Removable Water Tank
- 
Easy Roll Casters
- 
Multi-functional Filters
- 
UV
- 
Colasma
Air Purification
Technology

Aolis

















Features: ☐ Standard ☒ Optional

- 
Humidity Display
- 
Multiple Fan Speeds
- 
LED Display
- 
Quiet Design
- 
24-hour Timer
- 
Self Diagnosis
- 
Auto Restart
- 
Intelligent Defrost
- 
Water Full Indicator
- 
Water Overflow Protection
- 
External Drain Connector
- 
Removable Water Tank
- 
Easy Roll Casters
- 
Multi-functional Filters
- 
UV
- 
Colasma
Air Purification
Technology


















Aomi

Features: ☐ Standard ☐ Optional

- | | | | | | | | |
|---|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |  |
| Humidity Display | Multiple Fan Speeds | LED Display | Quiet Design | 24-hour Timer | Self Diagnosis | Auto Restart | Intelligent Defrost |
|  |  |  |  |  |  |  |  |
| Water Full Indicator | Water Overflow Protection | External Drain Connector | Removable Water Tank | Easy Roll Casters | Multi-functional Filters | UV | Colasma Air Purification Technology |


Chalet

Features: ☐ Standard ☐ Optional


- | | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| Humidity Display | Multiple Fan Speeds | LED Display | Quiet Design | 24-hour Timer | Self Diagnosis | Auto Restart | Intelligent Defrost |
|  |  |  |  |  |  |  | |
| Water Level Display | Water Full Indicator | Water Overflow Protection | External Drain Connector | Removable Water Tank | Easy Roll Casters | Multi-functional Filters | |

Granto


Features: ☐ Standard ☐ Optional




Humidity Display




Multiple Fan Speeds




LED Display




Quiet Design




24-hour Timer




Self Diagnosis




Auto Restart




Intelligent Defrost




Water Level Display




Water Full Indicator




Water Overflow Protection




External Drain Connector




Removable Water Tank




Easy Roll Casters



Multi-functional Filters




UV




Colasma
Air Purification
Technology

Petal


Features: ☐ Standard ☐ Optional




Humidity Display




Multiple Fan Speeds




LED Display




Quiet Design




Self Diagnosis




Auto Restart




Intelligent Defrost




Water Level Display




Water Full Indicator




Water Overflow Protection




External Drain Connector



Removable Water Tank



Easy Roll Casters



Multi-functional Filters

VEHICLE AIR CONDITIONER

- Gocool



Gocool

Compact Size


We use high quality PP plastic for the casing of the outdoor unit (EPP foam for the base) to ensure a solid body. The weight of the outdoor unit is down by 17.6%, which lowers the gravity center of the vehicle and makes the driving agile and steady. Flexible material is adopted to reduce mechanical vibration and avoid sympathetic vibration, enabling a quiet space inside the vehicle.

pp plastic

Lighter outdoor unit
Less mechanical vibration
Quiet and more comfortable



ODU Weight(Kg)

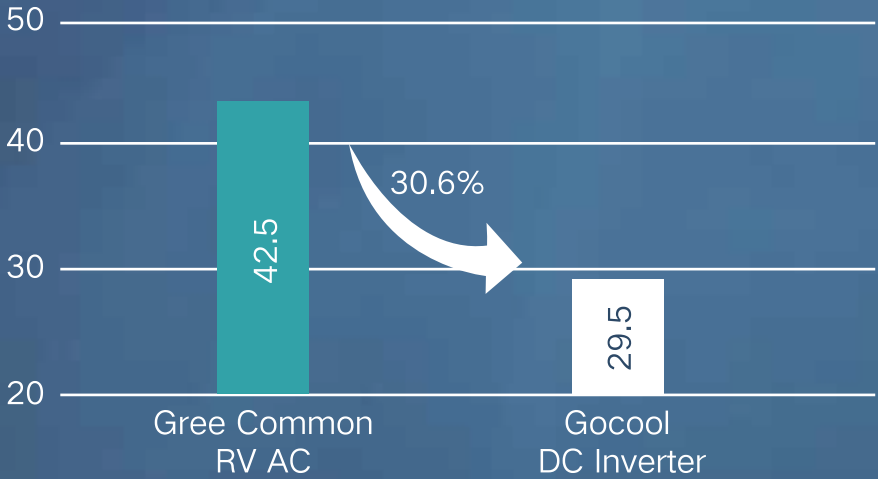


Features: ☐ Standard ☐ Optional

- | | | | | | | | |
|-------------|---------------------|---------------------------|---------------|------------|--------------------------|----------------|--------------------------|
| LED Display | Multiple Fan Speeds | Comfortable Sleeping Mode | 24-hour Timer | Dry Mode | Auto Restart | Self-Diagnosis | Filter Cleaning Reminder |
| Anti-cold | Turbo | Wifi Control | Fast Cooling | Child Lock | Multi-functional Filters | | |


Strong Performance

Gocool is equipped with a brand new type vertical heat exchanger and a high-performance rotary compressor to improve heat exchange efficiency. It achieves greater improvement both in cooling and heating capacity, providing ultimate comfort for your travel.

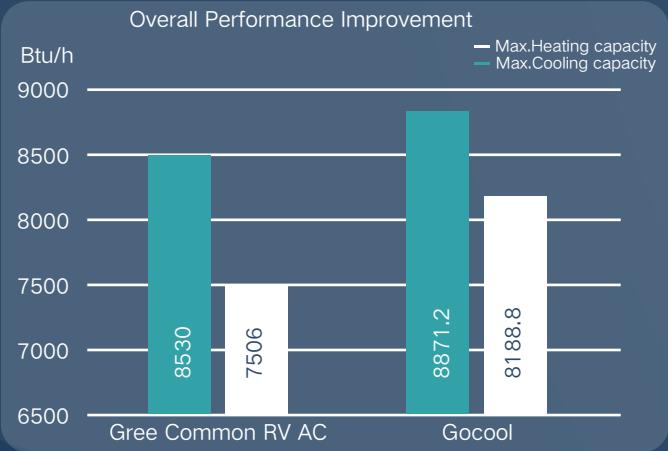


No Fear for Extreme Weather

Even under extreme weather conditions such as scorching heat and bitter cold, Gocool can still work effectively, with no fear for deserts or snowfields, which is great for travel.

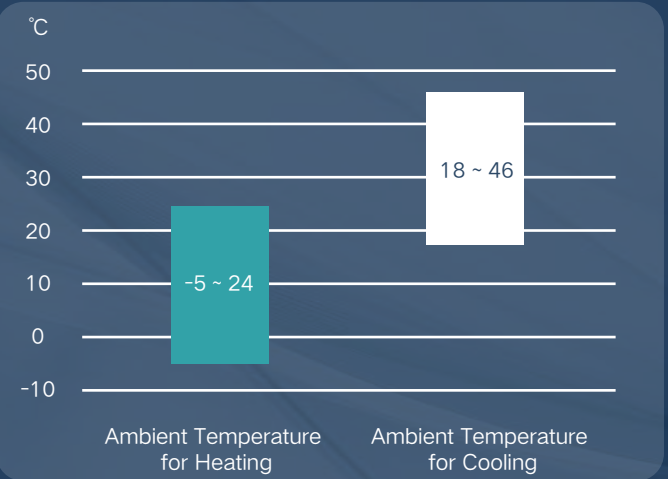

Efficient Noise Reduction

The new air duct design is optimized through the Computational Fluid Dynamics(CFD) technology. Gocool features a super high airflow rate and ultimate quiet operation. The indoor unit noise is lowered by 3dB(A) while the outdoor unit noise is decreased by 11dB(A).

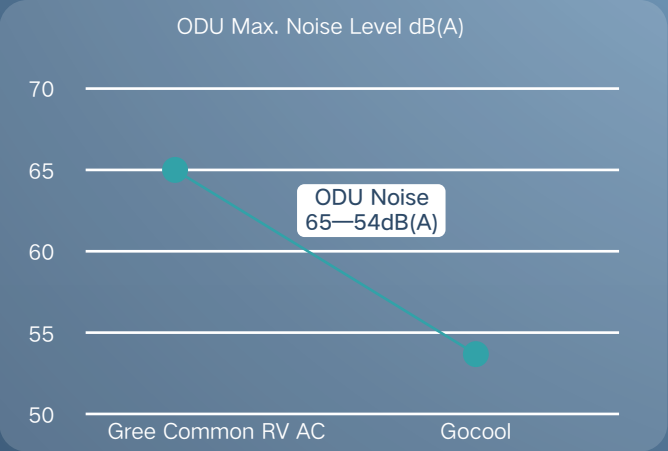

LIGHT COMMERCIAL

- Free Match
- U-Match




Icon Interpretation

SOME PARTS



Anti-corrosion fin

The anti-corrosion performance of golden fins is 3 times better than ordinary fins.



Inner groove copper

Special thickened inner groove copper tube enhances heat exchanging performance.



Built-in drain pump

The drain pump can pump the condensation to a high level. It facilitates condensation draining from the indoor unit and makes the installation of indoor unit easier.



Washable filter

Filters are easy to dismantle and install. You can use dirt collector or water to clear away the dust.

COMFORTABLE & HEALTHY



Horizontal auto swing

The air guide louver can move horizontally for efficient air and temperature distribution in the room.



Vertical auto swing

The air guide louver can move vertically for efficient air and temperature distribution in the room.



Anti-cold

The indoor unit will not blow in winter if the air is not warm enough.



Turbo

The unit cools and heats the room rapidly to make you feel more comfortable (cool or warm).

HIGH EFFICIENCY & ENERGY SAVING



High efficiency

The air conditioner is designed to high energy efficiency and to realize power saving.



Intelligent defrosting

Defrosting is performed intelligently when necessary to improve the heating efficiency and save energy.

CONVENIENCE



Auto restart

The unit is able to remember the operation status before power failure and it can automatically return to that operation status once the power is recovered.



Compact design

The unit is designed with smaller dimension, which is easy to install and transport for saving cost.



Quality motor

Quality motor enables stable operation and low noise.



Auxiliary electric heater

Auxiliary heater greatly improves heating capacity and saves energy.



Slave and master wired controller

One indoor unit can be connected with two wired controllers to realize controlling of the same indoor unit from different control points.



Long connection pipe design

The total length of connection pipe reaches 1000m, which greatly improves the project flexibility of the unit.



Ventilation

The unit can supply some fresh air to satisfy your requirements.



Comfortable sleeping mode

After setting the "sleeping mode", set temperature and indoor noise can be adjusted for more comfortable.



Quiet design

The unit operates with the lowest noise under the ultra-low fan speed.



Energy saving function

When this function is activated, the temperature setting is only in limited range, so as to save energy.



All DC inverter technology

All motors adopts the DC inverter technology to greatly improve the energy efficiency.



Easier maintainability

The unit is designed to be easier for maintenance and component replacement.



Auto addressing technology

The new generation of indoor unit applies auto addressing technology, which greatly reduces project debugging time and error rate.

RELIABILITY



Self-cleaning

When the unit is turned off, indoor fan will still run at the low speed for a while to dry inner components and parts, thus preventing mildew and keeping users healthy.



Self-diagnosis

Error codes are shown on the display panel when there are any fault, easy for maintenance.



Low voltage startup

The unit is able to be started up safely under low voltage.

VERSATILITY



High ESP

The external static pressure range is higher, which ensures longer delivery distance for air to provide powerful cooling.



Wide voltage range

The unit can operate in a wide range of voltage for greatly reducing the impact of voltage fluctuation.



Wide operation range

The unit can operate in wide range, greatly reducing the ambient temperature limitation.

CONTROLLER



24-hour timer

The unit can be turned on or turned off by timer setting at anytime in a day (the timer interval is 5-minute).



Weekly timer

The unit can be set to start heating or cooling anytime on a daily or weekly basis.



°C/°F switch

Under off status, press MODE and "-" buttons simultaneously to switch °C/°F.



Clock display

Time is shown on the remote controller.



Child lock

It avoids children's misoperation on the remote controller.



Key-card control

The key-card control function is specially designed for hotel rooms. After removing the key-card, the air conditioner will automatically switch to standby status.



Low temperature heating

The unit is able to start and operate in normal when the ambient temperature is lower than -20°C and heating capacity remains still.



Modular operating

Several units can operate together as modules, so that capacity output control is more precise, and also higher reliability.



Comprehensive protection

The unit is designed with various of protection functions to ensure the reliability.



Multiple fan speeds

Multiple fan speeds are provided to satisfy different requirements for the air volume.



Modular structure

High efficiency compressor presents reliable performance.



Centralized control

Turn on, turn off and regulate the from a distance.



Long-distance monitoring

Long-distance monitoring enables the unit to be controlled and monitored from a long distance.



Shield function

Remote control the indoor unit and shield the functions of wired controller, such as ON/OFF, temp or mode setting, energy-saving function, etc.



Human engineering operation

Adopts the technologies of auto addressing, non-polar communication and auto debugging, which improves the project efficiency.


















Floor heating debugging

As for the first floor heating debugging, the floor should be preheated in segment to prevent deformation due to thermal expansion and contraction caused by rapid change of temperature.

Free Match

Whole Home Flexible Solution
Cooling and heating with FREE MATCH

Features: ☐ Standard ☐ Optional

- | | | | | | | | |
|--|---|---|---|--|---|---|---|
| 
Inner groove copper | 
Turbo | 
High efficiency | 
Intelligent defrosting | 
Auto restart | 
Easier maintainability | 
Compact design | 
Self-diagnosis |
| 
Low voltage startup | 
Comprehensive protection | 
Wide voltage range | 
°C/°F switch | 
24-hour timer | 
Centralized control | 
Long-distance monitoring | 
Child lock |









Multi Split System
+
Domestic Hot Water

Water discharge
temperature
reaches 55°C





Capacity Index(Btu/h)		7000	9000	12000	18000	24000
Wall mounted Type	Airy 	●	●	●	●	●
	S-cool 	●	●	●	●	●
	Clivia 		●	●	●	●
	Pular 	●	●	●	●	●
	Charmo 	●	●	●	●	●
	Cosmo 	●	●	●	●	●
Duct type 			●	●	●	●
Cassette type 			●	●	●	●
Floor ceiling type 			●	●	●	●
Console 			●	●	●	

Control system lineup

Product series			Duct type	Cassette type	Floor ceiling type	Console type
Control system						
Wired controller	XK76 		●	●	●	●
	XK19 		●	●	●	
Centralized controller	CE50-24/E 		●	●	●	●
	CE52-24/F(C) 		●	●	●	●

Item	Normal operating condition(temperature)				Operation range (temperature)	O perating condition (temperature)
	Outdoor condition		Indoor condition		Outdoor condition	Outdoor condition (LC)(LH)
	DB(°C)	WB(°C)	DB(°C)	WB(°C)	DB(°C)	DB(°C)
Cooling	35	24	27	19	18~43	-15~43
Heating	7	6	20	15	-15~24	-22~24

	Two indoor units	
	07+07	09+09
	07+09	09+12
	07+12	/


	Two indoor units	
	07+07	09+09
	07+09	09+12
	07+12	12+12

 21k	Two indoor units		Three indoor units	
	07+07	09+09	07+07+07	09+09+09
	07+09	09+12	07+07+09	09+09+12
	07+12	09+18	07+07+12	/
	07+18	12+12	07+09+09	/
	/	12+18	07+09+12	/
/	/	07+12+12	/	

 24k	Two indoor units		Three indoor units	
	07+07	09+09	07+07+07	09+09+09
	07+09	09+12	07+07+09	09+09+12
	07+12	09+18	07+07+12	09+09+18
	07+18	12+12	07+07+18	09+12+12
	/	12+18	07+09+09	12+12+12
	/	18+18	07+09+12	/
	/	/	07+09+18	/
/	/	07+12+12	/	

 28k	Two indoor units	Three indoor units		Four indoor units	
	07+07	07+07+07	09+09+09	07+07+07+07	07+09+09+09
	07+09	07+07+09	09+09+12	07+07+07+09	07+09+09+12
	07+12	07+07+12	09+09+18	07+07+07+12	07+09+12+12
	07+18	07+07+18	09+12+12	07+07+07+18	09+09+09+09
	09+09	07+09+09	09+12+18	07+07+09+09	09+09+09+12
	09+12	07+09+12	12+12+12	07+07+09+12	09+09+12+12
	09+18	07+09+18	12+12+18	07+07+09+18	/
	12+12	07+12+12	/	07+07+12+12	/
	12+18	07+12+18	/	/	/
18+18	/	/	/	/	


 36k	Two indoor units		Three indoor units		Four indoor units		
	07+12	12+12	07+07+07	09+09+09	07+07+07+07	07+09+09+09	09+09+09+09
	07+18	12+18	07+07+09	09+09+12	07+07+07+09	07+09+09+12	09+09+09+12
	07+24	12+24	07+07+12	09+09+18	07+07+07+12	07+09+09+18	09+09+09+18
	09+09	18+18	07+07+18	09+09+24	07+07+07+18	07+09+09+24	09+09+09+24
	09+12	18+24	07+07+24	09+12+12	07+07+07+24	07+09+12+12	09+09+12+12
	09+18	24+24	07+09+09	09+12+18	07+07+09+09	07+09+12+18	09+09+12+18
	09+24	/	07+09+12	09+12+24	07+07+09+12	07+09+12+24	09+09+12+24
	/	/	07+09+18	09+18+18	07+07+09+18	07+09+18+18	09+09+18+18
	/	/	07+09+24	09+18+24	07+07+09+24	07+12+12+12	09+12+12+12
	/	/	07+12+12	12+12+12	07+07+12+12	07+12+12+18	09+12+12+18
	/	/	07+12+18	12+12+18	07+07+12+18	/	12+12+12+12
	/	/	07+12+24	12+12+24	07+07+12+24	/	12+12+12+18
	/	/	07+18+18	12+18+18	07+07+18+18	/	/
	/	/	07+18+24	18+18+24	/	/	/

	Two indoor units	Three indoor units		Four indoor units		Five indoor units	
	07+18	07+07+07	09+09+09	07+07+07+07	09+09+09+09	07+07+07+07+07	07+09+09+09+09
 42k	07+24	07+07+09	09+09+12	07+07+07+09	09+09+09+12	07+07+07+07+09	07+09+09+09+12
	09+12	07+07+12	09+09+18	07+07+07+12	09+09+09+18	07+07+07+07+12	07+09+09+09+18
	09+18	07+07+18	09+09+24	07+07+07+18	09+09+09+24	07+07+07+07+18	07+09+09+09+24
	09+24	07+07+24	09+12+12	07+07+07+24	09+09+12+12	07+07+07+07+24	07+09+09+12+12
	12+12	07+09+09	09+12+18	07+07+09+09	09+09+12+18	07+07+07+09+09	07+09+09+12+18
	12+18	07+09+12	09+12+24	07+07+09+12	09+09+12+24	07+07+07+09+12	07+09+09+12+24
	12+24	07+09+18	09+18+18	07+07+09+18	09+09+18+18	07+07+07+09+18	07+09+09+18+18
	18+18	07+09+24	09+18+24	07+07+09+24	09+09+18+24	07+07+07+09+24	07+09+12+12+12
	18+24	07+12+12	09+24+24	07+07+12+12	09+12+12+12	07+07+07+12+12	07+09+12+12+18
	24+24	07+12+18	12+12+12	07+07+12+18	09+12+12+18	07+07+07+12+18	07+12+12+12+12
	/	07+12+24	12+12+18	07+07+12+24	09+12+12+24	07+07+07+12+24	07+12+12+12+18
	/	07+18+18	12+12+24	07+07+18+18	09+18+18+18	07+07+07+18+18	09+09+09+09+09
	/	07+18+24	12+18+18	07+07+18+24	12+12+12+12	07+07+07+18+24	09+09+09+09+12
	/	07+24+24	12+18+24	07+07+24+24	12+12+12+18	07+07+09+09+09	09+09+09+09+18
	/	/	12+24+24	07+09+09+09	12+12+12+24	07+07+09+09+12	09+09+09+09+24
	/	/	18+18+18	07+09+09+12	12+12+18+18	07+07+09+09+18	09+09+09+12+12
	/	/	18+18+24	07+09+09+18	/	07+07+09+09+24	09+09+09+12+18
	/	/	/	07+09+09+24	/	07+07+09+12+12	09+09+09+12+24
	/	/	/	07+09+12+12	/	07+07+09+12+18	09+09+09+18+18
	/	/	/	07+09+12+18	/	07+07+09+12+24	09+09+12+12+12
	/	/	/	07+09+12+24	/	07+07+09+18+18	09+09+12+12+18
	/	/	/	07+09+18+18	/	07+07+12+12+12	09+12+12+12+12
	/	/	/	07+09+18+24	/	07+07+12+12+18	09+12+12+12+18
	/	/	/	07+12+12+12	/	07+07+12+12+24	12+12+12+12+12
	/	/	/	07+12+12+18	/	07+07+12+18+18	/
	/	/	/	07+12+12+24	/	/	/
	/	/	/	07+12+18+18	/	/	/
	/	/	/	07+12+18+24	/	/	/
	/	/	/	07+18+18+18	/	/	/

U-MATCH



U-MATCH is an air conditioning product in which the outdoor unit is generally designed to be matched with different types of indoor units (duct type, cassette type, floor ceiling type), saving the cost of warehouse management and after-sales maintenance.
The cooling capacity ranges from 3.5kW to 16kW, applicable to houses, hotels, restaurants, stores, office buildings, etc.

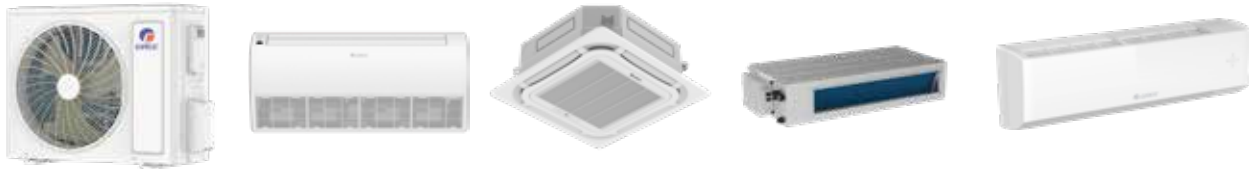

Quality motor



Built-in drain pump



Turbo function



Quiet function



All DC inverter technology



High efficiency



Wide voltage range



Low temperature heating

- SEER up to 7.20 and energy efficiency rated at A++ for the whole series thanks to all DC inverter system and high-efficiency casing design, leading to 10% energy savings on average compared to the last generation.
- 5H health protection: fresh air provision for the entire range of indoor units, optional healthy and sterilizing accessories, multiple air purification methods to ensure quality air in real time.
- Originally designed bionic fan blades and low noise compressor lower indoor unit sound level to 28dB.
- Adopt high precision temperature and humidity dual sensors ($\pm 0.5^{\circ}\text{C}$) to fully consider the impact of humidity on thermal comfort, reduce excessive dehumidification and substantially improve the level of comfort through intelligent correction of indoor temperature and humidity.
- WiFi module for remote APP control; smart sensor, with 360 ° temperature field detection, can automatically adjust airflow direction and the air conditioner's operation status by detecting the positions of occupants in the room.
- When installing the unit, wiring and piping can be done without opening the casing, saving installation time.
- Single fan compact design for outdoor units of the whole series, for the ease of transportation and installation
- Provide different debugging tools, for example, the portable debugger, which can monitor real-time operating parameters, set unit parameters and store underlying data; the monitoring and debugging software, which can remotely monitor operating conditions and parameters. After-sales personnel can check the monitored data to locate errors. Troubleshooting is more accurate and efficient.

Indoor Unit



Duct type

- » DC motor, energy-saving and high efficiency.
- » Fresh air unit can be connected.
- » Lift of water pump is 1000mm.
- » Energy efficiency can be up to A++ in cooling season and A+ in heating season.

Floor ceiling type

- » DC motor, energy-saving and high efficiency.
- » Fresh air unit can be connected.
- » Lift of water pump is 1000mm.
- » Energy efficiency can be up to A++ in cooling season and A+ in heating season.

Cassette type









































- » 360 ° air discharge for balance room temperature.
- » DC motor and DC water pump, energy-saving and high efficiency.
- » Fresh air unit can be connected.
- » Lift of water pump is 1000mm.
- » Energy efficiency can be up to A++ in cooling season and A+ in heating season.

Wall-mounted


- » DC motor, energy-saving and high-efficiency.
- » Energy efficiency can be up to A++ in cooling season and A+ in heating season.

Item	Nominal operating condition(temperature)				Operating range(temperature)
	Outdoor condition		Indoor condition		Outdoor condition
	DB(°C)	WB(°C)	DB(°C)	WB(°C)	DB(°C)
Cooling	35	24	27	19	-20-52℃
Heating	7	6	20	15	-20-24℃

Units Lineup

Capacity index		35	50	71	85	100	125	140	160
Outdoor unit									
	Duct (without water pump)								
	Duct (without water pump)								
	Cassette								
Indoor unit	Floor ceiling								





Control System Lineup

Controlling system	Model	Outlook	Duct	Cassette	Floor ceiling	Wall mounted
Remote Controller	YAP1F7					
	YAP1F					
Wired controller	XE7A-24/H					
Wired controller (WiFi)	XE7A-24/HC					
Duct unit LED panel (matched with remote controller)	JS13					
Access control	LE60-24/H1					
Centralized controller	CE52-24/F(C)					
	CE58-00/EF(CM)					
Modbus gateway	ME50-00/EG(M)					
Wired controller	XE7C-24/H					
	XE7C-24/HC					

Note:
 means standard,  means optional.
 *This product model is under developemnt. Please confirm the final specifications with sales representatives.

Outdoor Unit Lineup

U-match VI

Type	Model designation	Power supply	35	50	71	85
Heat pump	GUD**W1/NhA-S GUD**W1/NhA-S (LCLH)	220-240V ~1Ph~50/ 60Hz				

Type	Model designation	Power supply	100	125	140	160
Heat pump	GUD**W1/NhA-S GUD**W1/NhA-S (LCLH)	220-240V ~1Ph~50/ 60Hz				
Heat pump	GUD**W1/NhA-X GUD**W1/NhA-X (LCLH)	380-415V~ 3Ph~50/ 60Hz				

Note

[illegible]